
NORLUX
Lighting Solutions

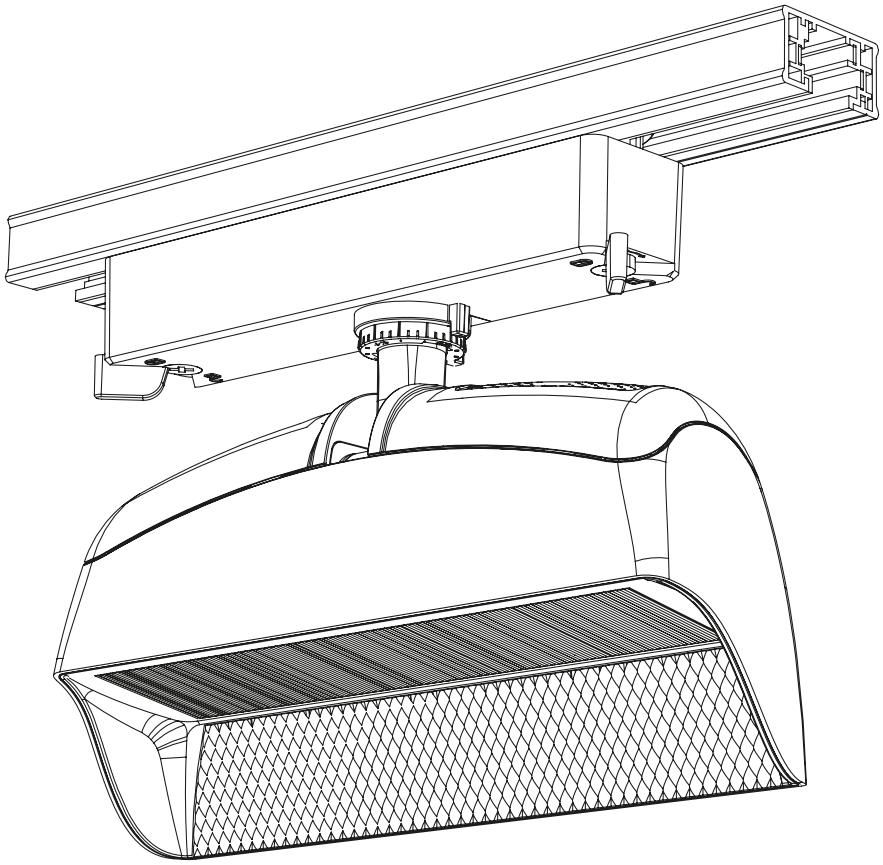

Milo 2 Wallwasher

INSTALLATION MANUAL

⚠ **Safety Notes**:

- The product must be installed, maintained, and operated as instructions below.
- Before starting installation of this product, make sure power supply is disconnected.
- Only to be installed by authorized electrician.
- Do not use abrasives or solvents when cleaning.
- Do not install the product if it appears damaged in any way. Check with manufacturer if in doubt.
- Do not modify this fitting in any matter as this will void warranty.
- Check protection class, if class I, it must be earthed.
- Disconnect power supply before maintenance or cleaning.


⚠ **Sikkerhetsinformasjon**:

- Følg installasjonsmanual for korrekt montering.
- Koble alltid fra strømmen før montering eller vedlikehold.
- Kan kun monteres av autorisert elektriker.
- Monter ikke produktet hvis det er synlig skade. Kontakt forhandler eller produsent.
- Bruk ikke løsemidler ved rengjøring
- Produktet skal ikke under noen omstendigheter endres eller modifiseres.
- Sjekk produktets isolasjonsklasse. Ved isolasjonsklasse I skal produktet jordes.


Imported by Norlux AS | Borgeskogen 32, 3160 Stokke, Norway | norlux.com

Recommended installation

① Track Installation




②Hidden Track Installation




A1

Rotation and tilt

0~360°Rotation







0~90°Rotation

A2


3wire1circuit

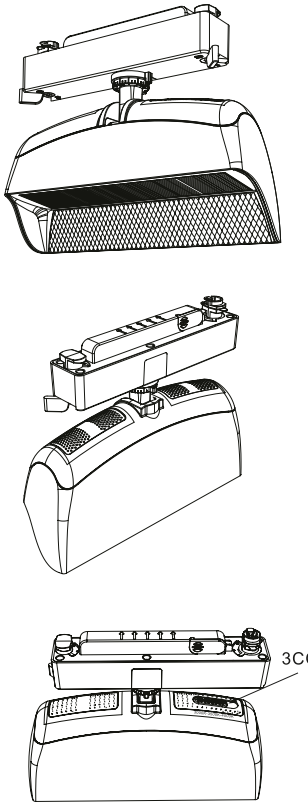

A3

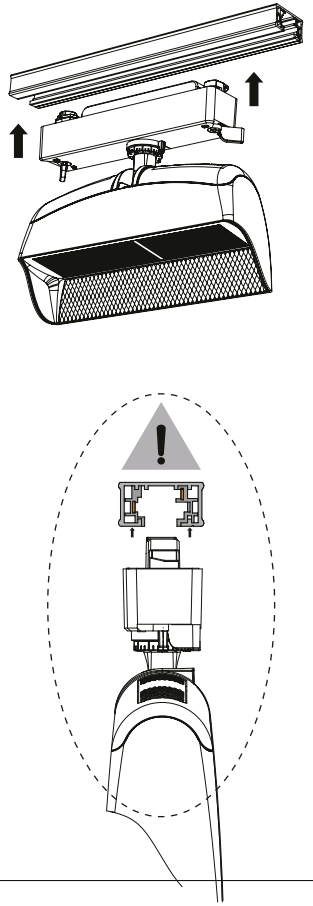

A4

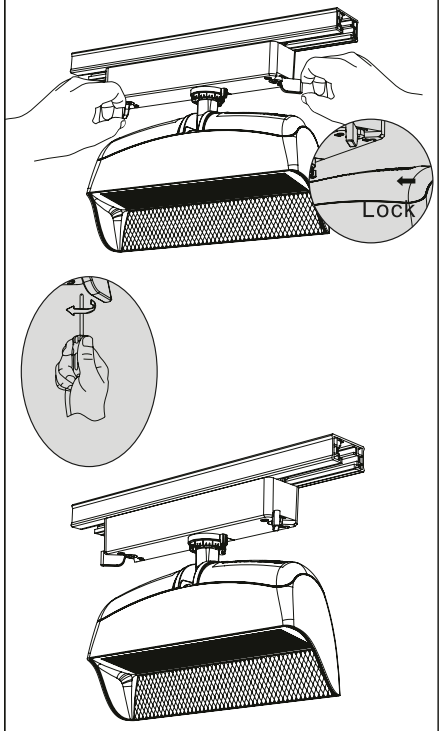


Insert adapter into track channel, lock spring latches (audible click) or turn screws 90° clockwise with flat-head screwdriver, then confirm pad-to-rail contact for power continuity.


A5


Please turn off the power before rotating the track light.

When rotate the lamp to the stop position, do not continue to rotate in the same direction.



It is recommended to install it on the ceiling, and it is prohibited to install it on the side walls and floor.

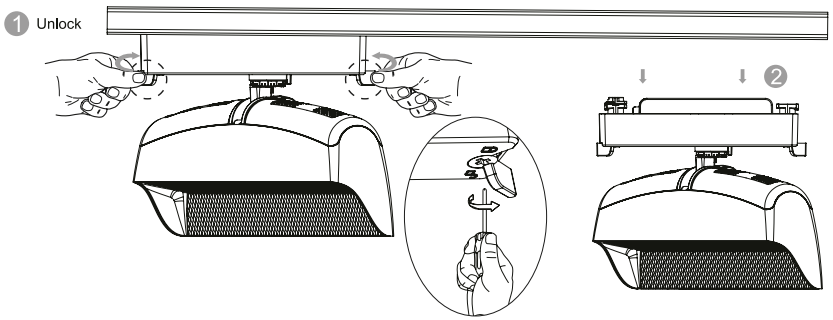



Don't touch the luminaires when turned on.

