


## Trunk



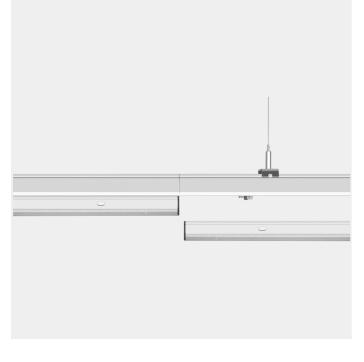

72.3

-/+180 -150 150 -120 120 -90 90 -60 60 240 UNIT:cd/klm 320 C0/180,96.9 C90/270,114.7 -30 30 400 0 AVERAGE BEAM ANGLE(50%):105.8 DEG

Trunk is a premium quality and highly advanced linear pendant light system offering

Unit: mm

1518

continuous light distribution. We offer a variety of accessories securing easy installation

and various layouts ensuring a natural like lighting to any area. The Trunk light fixtures

are manufactured in ultra-thin steel plates securing a long-life product. The Trunk fixtures

are delivered with all needed installation details in one box and no tools are needed for

the installation. Please see technical table below for detailed information. Batteries for emergency: 1 year warranty

SPECIFICATIONS	
Lightsource Type:	LED (built in)
System Power [W]:	35W
CCT (Color Temperature):	3000К
CRI / Ra:	80
Lumen Output:	5443lm
Lumen LED (tc=25):	5600lm
Beam Angle:	90°
Lens (Diffuser):	Clear
Dimming:	None
System Voltage [V]:	230V 50Hz
Connection:	Trunk 8-wires
Mounting:	Suspended, Ceiling
Lifetime [h]:	L80B50: 60 000h
Lumen/W:	155lm/W
Color:	White
Length [mm]:	1500mm
Height [mm]:	78,6mm
Width [mm]:	72,3mm
Weight [kg]:	1,64kg

NORLUX AS | Borgeskogen 32, 3160 Stokke | post@norlux.com | +47 33 30 10 80 | www.norlux.com

Δ+