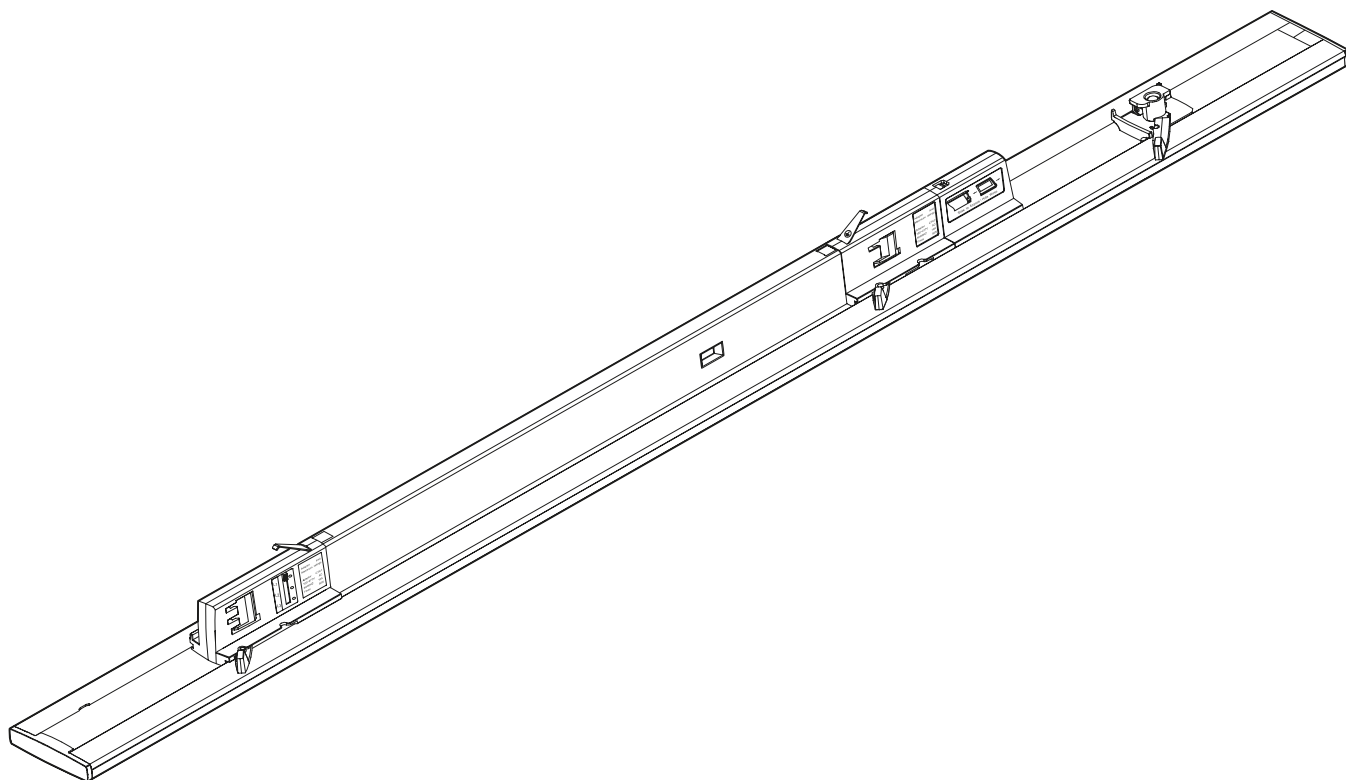


**ART. NO.**

103120-60-2  
103120-60-3  
103121-60-3  
103120-60-2-ddd

**NORLUX®***Lighting Solutions*

# T-Line Louvre

## INSTALLATION MANUAL

**⚠ Safety Notes:**

- The product must be installed, maintained, and operated as instructions below.
- Before starting installation of this product, make sure power supply is disconnected.
- Only to be installed by authorized electrician.
- Do not use abrasives or solvents when cleaning.
- Do not install the product if it appears damaged in any way. Check with manufacturer if in doubt.
- Do not modify this fitting in any matter as this will void warranty.
- Check protection class, if class I, it must be earthed.
- Disconnect power supply before maintenance or cleaning.

**⚠ Sikkerhetsinformasjon:**

- Følg installasjonsmanual for korrekt montering.
- Koble alltid fra strømmen før montering eller vedlikehold.
- Kan kun monteres av autorisert elektriker.
- Monter ikke produktet hvis det er synlig skade. Kontakt forhandler eller produsent.
- Bruk ikke løsemidler ved rengjøring
- Produktet skal ikke under noen omstendigheter endres eller modifiseres.
- Sjekk produktets isolasjonsklasse. Ved isolasjonsklasse I skal produktet jordes.


# LED Linear Lighting System | T Line | 3/4/6 Wires

## Safety notes:

Installation must be performed only by a qualified electrician.


Make sure that the fixture is disconnected from the AC supply.

This luminaire is to be installed in 3-wires/1-phases or 4-wires/3-phases or 6-wires/3-phases DALI track rails.

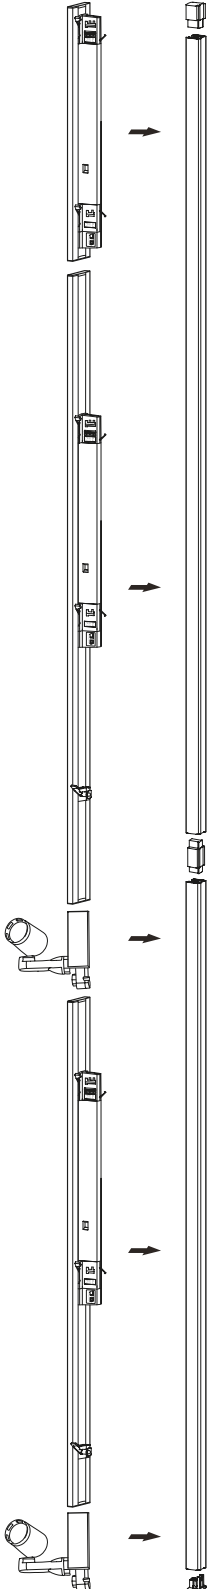


## Features:

Perfect solution for the retail business, shops, and supermarkets.  
Excellent quality with high efficiency up to 160lm/W.  
Four selectable powers with DIP switch.  
Flexible position of the luminaire in the rail by sliding left or right.

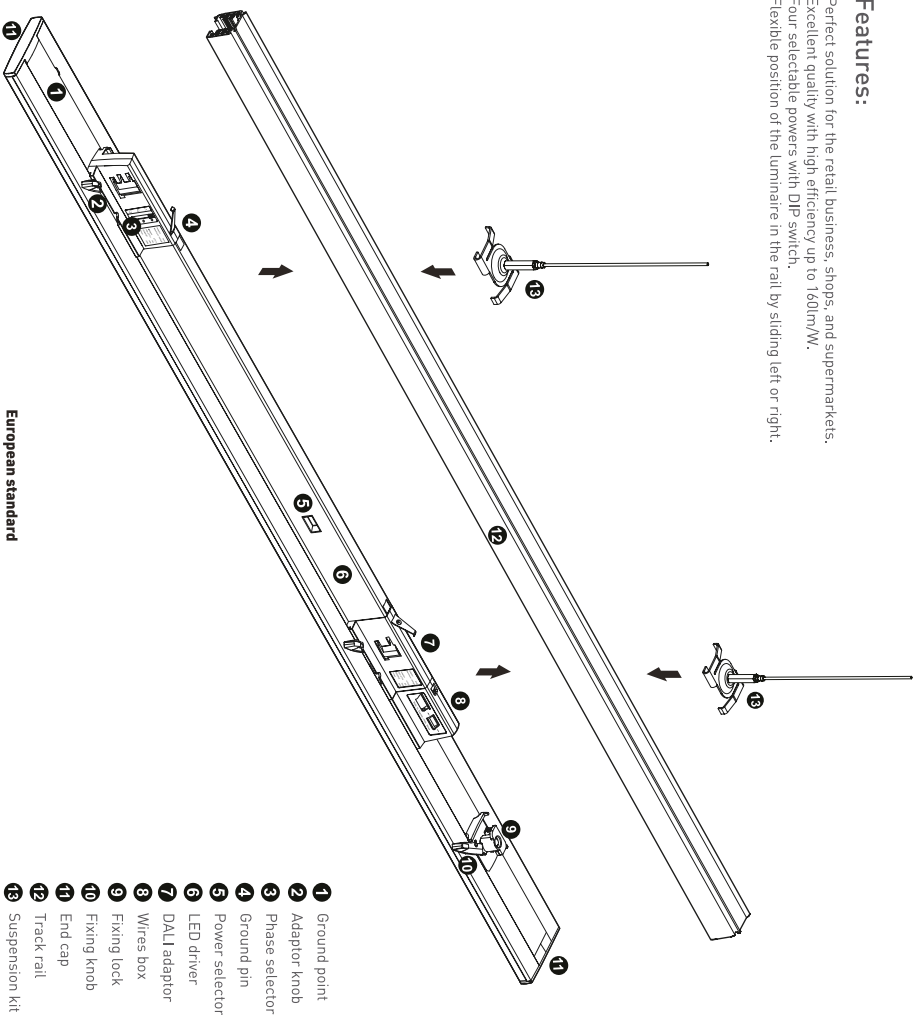


- 1 Ground point
- 2 Adaptor knob
- 3 Phase selector
- 4 Ground pin
- 5 Power selector
- 6 LED driver
- 7 DALI adaptor
- 8 Wires box
- 9 Fixing lock
- 10 End cap
- 11 Track rail
- 13 Suspension kit


**Step 1**  
Set the power in the **5 power selector** DIP switch.

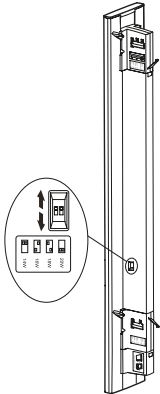

**Step 2**  
Choose the phase/circuit in the **3 phase selector** DIP switch.

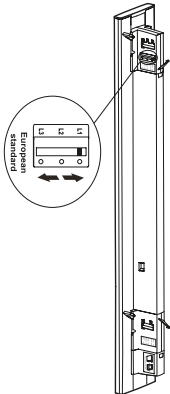

**Step 3**  
Insert the T-line luminaire into the **12 track rail** with the correct direction.

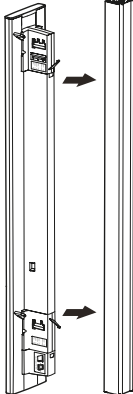

**Step 4**  
Lock the luminaire with the **2 adaptor knob** and the **10 fixing knob** by rotating the knobs clockwise.




⚠ When installed on an IT - Voltage network system, a 2-pole disconnection may be required.

# LED Linear Lighting System | T Line | 3/4/6 Wires

## How to avoid the track rail joints during installation

There are 4 movable positions for the LED driver in the T-line luminaire.  
There are 2 movable position of the fixing lock in the T-line luminaire.

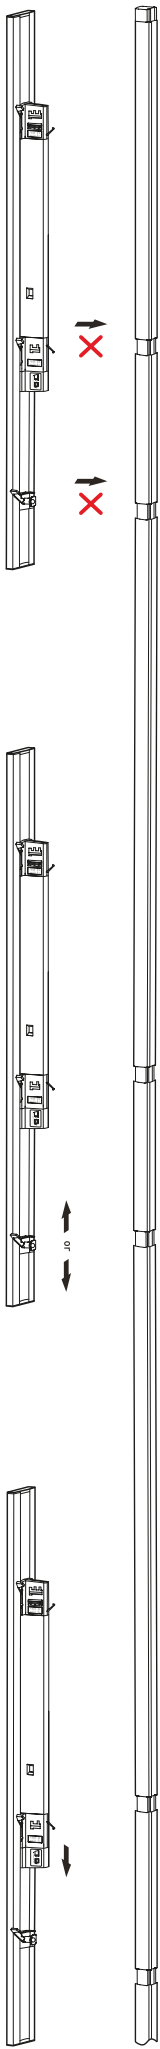


If the **12 track rail** joint interferes with the position of the **3 Fixing lock**, follow the instruction of **Step 1**.

If the **12 track rail** joint interferes with the position of the **6 LED driver**, follow the instructions from **Step 2** to **Step 5**.

**Step 1**  
Slide the **3 fixing lock** left or right to the second position to avoid the **12 track rail** joint.

**Step 2**  
Expose the wires in the **3 wires box** by moving it to the right.

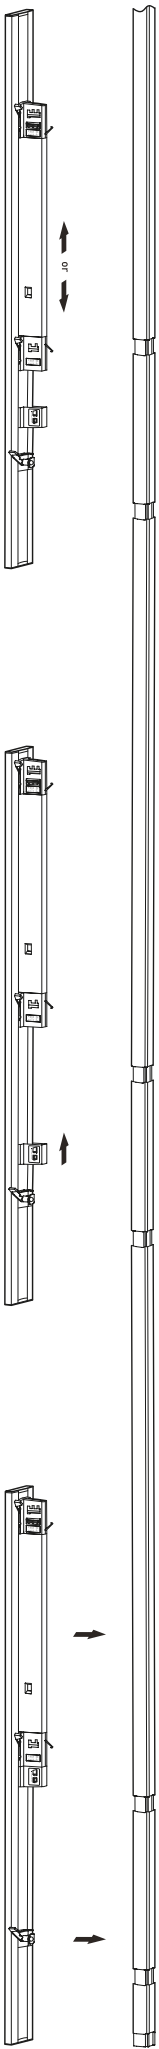


**Step 3**  
Slide the **6 LED driver** left or right to a free position.

**Step 4**  
Slide the **8 wires box** near the **6 LED driver**.  
Tidy up the wires and hide them by sliding the **8 wires box** back.

**Step 5**  
Install the T-Line luminaire into the **12 track rail**.


## Track rail

3-wires/1-phases  
4-wires/3-phases  
6-wires/3-phases

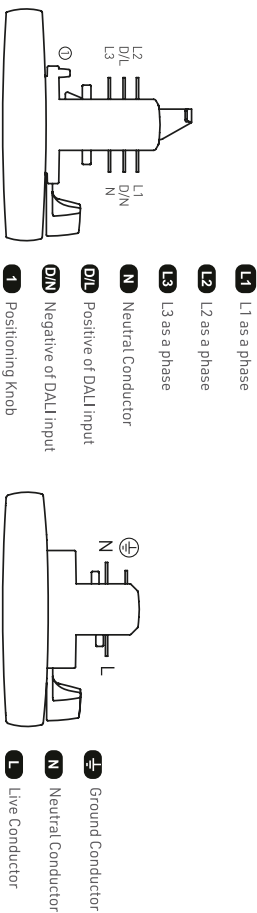

## Recommend track rail brands

Pay attention to the positioning knob. No Reverse Mount!  
Improper installation may cause irreparable damage.

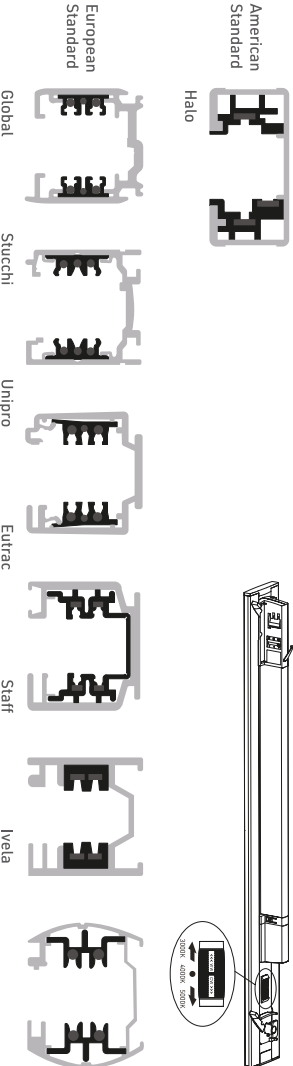

⚠ When installed on an IT - Voltage network system, a 2-pole disconnection may be required.