



## Tania Mini Basic







A\*\* -

## SPECIFICATIONS

Si Leintertitonis	
Lightsource Type:	LED (built in)
System Power [W]:	14,5,W
CCT (Color Temperature):	3000K
CRI / Ra:	90
Lumen Output:	1475lm
Lumen LED (tc=25):	1550lm
Beam Angle:	18°
Lens (Diffuser):	Clear
Dimming:	Phase-Cut
System Voltage [V]:	230V 50Hz
Connection:	Terminal
Mounting:	Recessed, Ceiling
Cut-out [mm]:	Ø51mm
Lifetime [h]:	L80B10: 55 000h
Color:	Black
Length [mm]:	148mm
Width [mm]:	60mm
Diameter [mm]:	60mm
To be recessed in insulation:	No

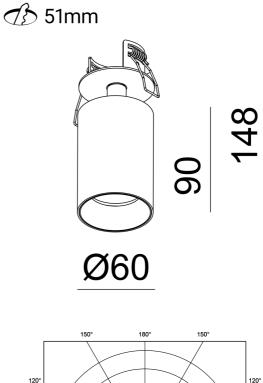



Tania Basic is a recessed spotlight that can be tilted and rotated. Available in white and black color. Gold frontring can be bought seperately.

NORLUX AS | Borgeskogen 32, 3160 Stokke | post@norlux.com | +47 33 30 10 80 | www.norlux.com