



PRODUCT SHEET


Apto

Art. no: 01002-30-3




Lighting Solutions

Apto

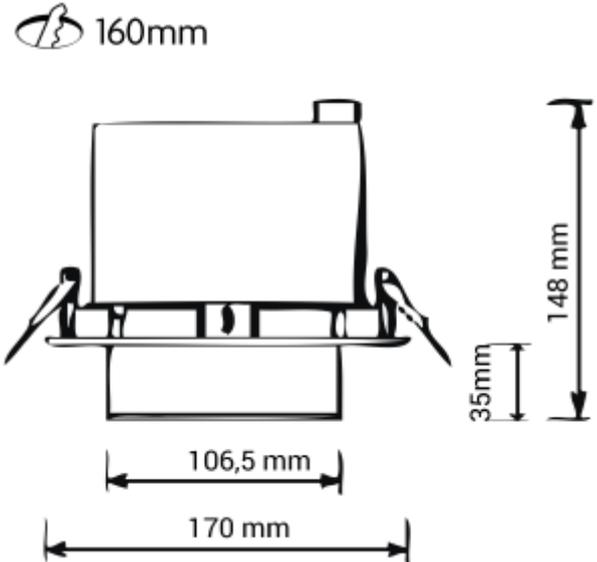

| SPECIFICATIONS | |
|-------------------------------|-----------------------|
| Lightsource Type: | LED (built in) |
| System Power [W]: | 18W |
| CCT (Color Temperature): | 3000K |
| CRI / Ra: | 80 |
| Lumen Output: | 2116lm |
| Lumen LED (tc=25): | 1950lm |
| Beam Angle: | 30° |
| Lens (Diffuser): | Clear |
| Dimming: | None |
| System Voltage [V]: | 230V 50Hz |
| Connection: | 18i3 Quick connection |
| Mounting: | Recessed, Ceiling |
| Cut-out [mm]: | Ø160mm |
| Lumen/W: | 118lm/W |
| UGR (<=): | 18 |
| MacAdam (SDCM): | 3 |
| Color: | White |
| Height [mm]: | 148mm |
| Diameter [mm]: | 170mm |
| Weight [kg]: | 1,15kg |
| To be recessed in insulation: | No |

Luminous Intensity Distribution Curve

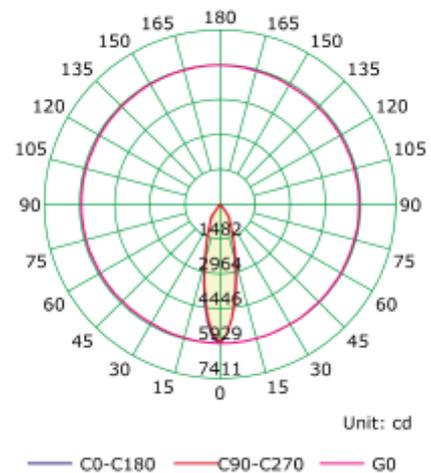

The Apto is a very suitable downlight for use in premises with low ceiling height. The model offers great flexibility in adjusting the light directions. The luminaire is delivered with a 18i3-connector and there is a rich variety of options for an easy plug and play" connection of the light fixture.