




PRODUCT FAMILY SHEET

Tania Mini 3-Circuit



Lighting Solutions

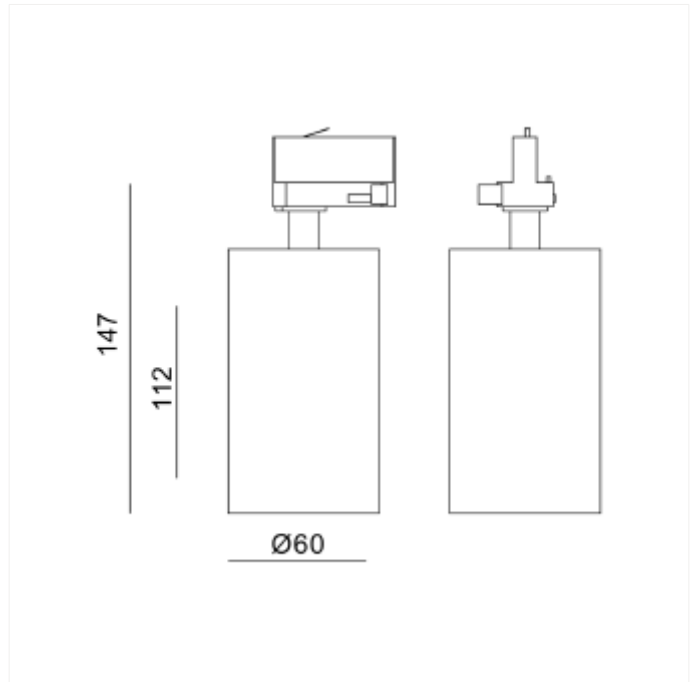

Tania Mini 3-Circuit

Tania Mini is a small spotlight in a contemporary design. Perfect for use at home and in other commercial settings. Front ring is sold separately. This version is with LED COB and no changeable lightbulb.

VERSIONS

Art.No	Effect [W]	Cold Lumen [lm]	Lumen Output [lm]	CCT [K]	Beam Angle [°]	Lens Difuser	CRI [>]	Color	Light Control	Connection
3550-3-36-2	14,5	1550	1400	3000	36°	Clear	90	Black	Phase-Cut	Track 3-Circuit
3551-3-36-3	14,5	1450	1050	2700	36°	Clear	90	White	Phase-Cut	Track 3-Circuit
3551-3-36-2	14,5	1450	1050	2700	36°	Clear	90	Black	Phase-Cut	Track 3-Circuit
3550-3-36-3	14,5	1550	1400	3000	36°	Clear	90	White	Phase-Cut	Track 3-Circuit
3551-25-2-ddd	14,5	1450	1400	2700	25	Clear	90	Black	DALI	Track 3-Circuit
3551-2-25-3-d dd	14,5	1450	1050	2700	25	Clear	90	White	DALI2	Track 3-Circuit+dim
3551-36-2-ddd	14,5	1450	1050	2700	36	Clear	90	Black	DALI2	Track 3-Circuit+dim
3551-2-36-3-d dd	14,5	1450	1050	2700	36	Clear	90	White	DALI2	Track 3-Circuit+dim
3550-2-36-2-d dd	14,5	1550	1400	3000	36	Clear	90	Black	DALI2	Track 3-Circuit+dim
3550-2-36-3-d dd	14,5	1550	1400	3000	36	Clear	90	White	DALI2	Track 3-Circuit+dim
3551-3-36-21	14,5	1450	1050	2700	36°	Clear	90	rushed Bra	Phase-Cut	Track 3-Circuit
3551-3-36-22	14,5	1450	1050	2700	36°	Clear	90	rushed Tita	Phase-Cut	Track 3-Circuit