



Quadro

75101-30-3



Quadro downlight available in a single and a double version. The Quadro combines the design details from track mounted spotlights with those of downlights. This will make a very nice design element in premises where one needs both track mounted and recessed fixtures.

140x140mm

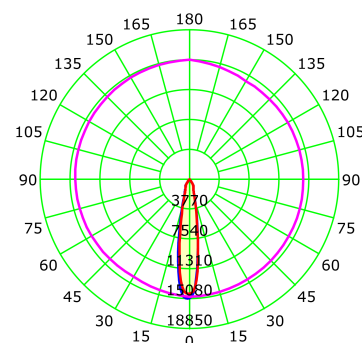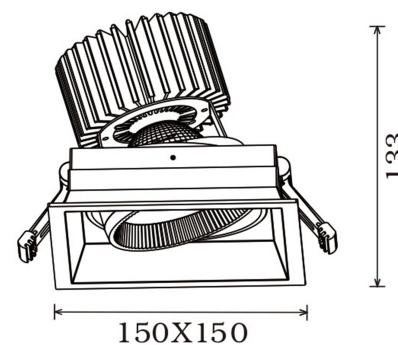

System Power [W]:	37W
CCT (Color Temperature):	Arctic White
CRI / Ra:	95
Lumen LED (tc=25):	3829lm
Beam Angle:	30°
Lens (Diffuser):	Clear
Dimming:	None
System Voltage [V]:	230V 50Hz
Connection:	18i3 Quick connection
Mounting:	Ceiling
Cut-out [mm]:	140x140mm
Lifetime [h]:	L80B10: 50.000h
MacAdam (SDCM):	3
Color:	White
Length [mm]:	150mm
Height [mm]:	133mm
Width [mm]:	150mm
Weight [kg]:	1,05kg
To be recessed in insulation:	No

All specifications are nominal values, deviations may occur.
 Product specifications are subject to change without notice.
 Electrical equipment designed to be part of a fixed electrical installation can only be installed by a registered installation company