

# Quadro

75103-30-3





Quadro downlight available in a single and a double version. The Quadro combines the design details from track mounted spotlights with those of downlights. This will make a very nice design element in premises where one needs both track mounted and recessed fixtures.



|                               |                       |
|-------------------------------|-----------------------|
| System Power [W]:             | 33W                   |
| CCT (Color Temperature):      | 3000K                 |
| CRI / Ra:                     | 90                    |
| Lumen LED (tc=25):            | 3750lm                |
| Beam Angle:                   | 30°                   |
| Lens (Diffuser):              | Clear                 |
| Dimming:                      | None                  |
| System Voltage [V]:           | 230V 50Hz             |
| Connection:                   | 18i3 Quick connection |
| Mounting:                     | Ceiling               |
| Cut-out [mm]:                 | 140x140mm             |
| Lifetime [h]:                 | L80B10: 50.000h       |
| MacAdam (SDCM):               | 3                     |
| Color:                        | White                 |
| Length [mm]:                  | 150mm                 |
| Height [mm]:                  | 133mm                 |
| Width [mm]:                   | 150mm                 |
| Weight [kg]:                  | 1,05kg                |
| To be recessed in insulation: | No                    |

140x140mm

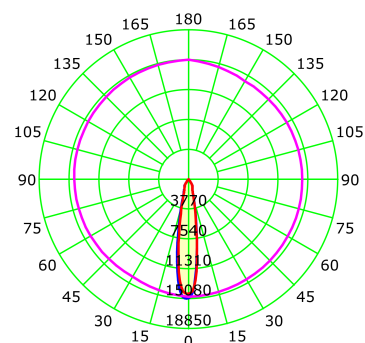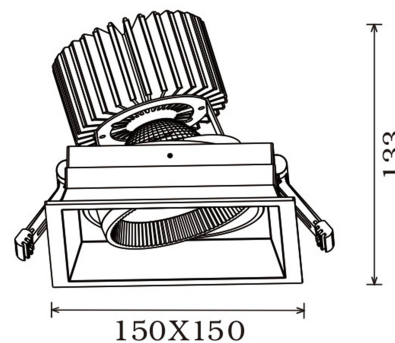

All specifications are nominal values, deviations may occur.  
 Product specifications are subject to change without notice.  
 Electrical equipment designed to be part of a fixed electrical installation can only be installed by a registered installation company