



## **Bladeline Z**






## SPECIFICATIONS

Lightsource Type:	LED (b
System Power [W]:	75W
CCT (Color Temperature):	3000K
CRI / Ra:	80
Lumen Output:	12411lı
Lumen LED (tc=25):	13000
Beam Angle:	Mediu
Dimming:	None
System Voltage [V]:	230V 5
Connection:	Quick
Mounting:	Surfac
Lifetime [h]:	L80B5
Lumen/W:	165lm,
UGR (<=):	19
MacAdam (SDCM):	3
Through-wiring (mm2):	5x2,5
Color:	Alumi
Length [mm]:	1539m
Height [mm]:	70mm
Width [mm]:	90mm
Weight [kg]:	3,4kg

LED (built in)
75W
3000K
80
12411lm
13000lm
Medium
None
230V 50Hz
QuickConnect
Surface, Ceiling
L80B50: 100 000h
165lm/W
19
3
5x2,5
Aluminium
1539mm
70mm
90mm

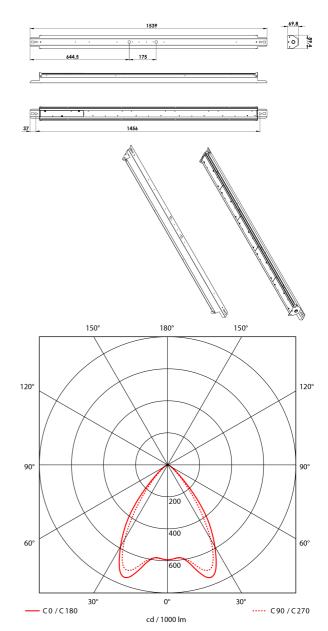

Bladeline Z is a highly efficient LED luminare with up to 179lm/w. Due to fact that it may be installed surface mounted on the ceiling or on electrical tracks makes it highly flexible. Can be opened without using tools and it has the electric connectors on quick fit clamps. The Bladeline Z is made from galvanized steel with medium or wide beam (75° and 90°) optic in 42W or 75W versions.