





FDV SPEC SHEET
Z line
Art. no: 102086-00-1-ddd

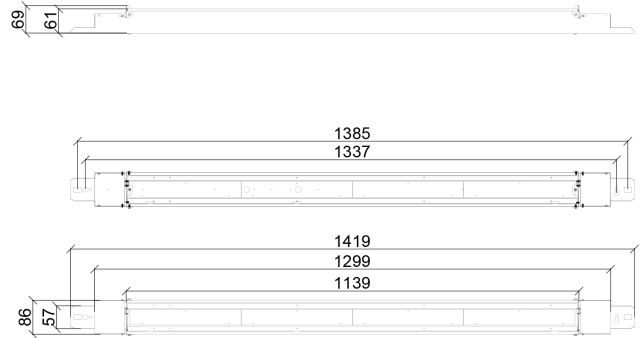

Z line

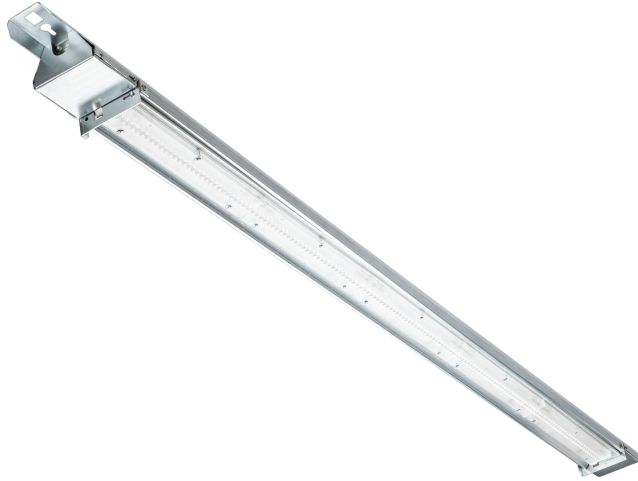

Art. no: 102086-00-1-ddd

LIGHT TECHNICAL

| | |
|--------------------------|----------------|
| Lightsource Type: | LED (built in) |
| Lumen Output: | 7630 |
| Lumen LED (tc=25): | 8000 |
| Beam Angle: | 70° |
| CCT (Color Temperature): | 4000 |
| CRI / Ra: | 80 |
| Color Code: | 840 |
| MacAdam (SDCM): | 3 |
| Lens (Diffuser): | Lens |

ELECTRICAL DATA

| | |
|----------------------|-----------|
| Dimming: | DALI2 |
| Flickerfree: | Yes |
| System Power [W]: | 42 |
| System Voltage [V]: | 230V 50Hz |
| Protection Class: | 1 |
| Current Output [mA]: | 350 |

MOUNTING / CONNECTION

| | |
|-----------------------|------------------|
| Connection: | QuickConnect |
| Through-wiring (mm2): | 5x2,5 |
| Mounting: | Surface, Ceiling |



FDV SPEC SHEET

Z line

Art. no: 102086-00-1-ddd



Lighting Solutions

PRODUCT

| | |
|-----------------------------|-----------------|
| Ingress Protection: | IP23 |
| Impact Protection: | IK02 |
| Operating Temperature [°C]: | 0 - 40 |
| Lifetime [h]: | L80B10: 100 000 |
| Color: | Steel |
| Length [mm]: | 1420 |
| Height [mm]: | 69 |
| Width [mm]: | 86 |
| Weight [kg]: | 3,35 |
| Housing Material : | Steel |