




# FDV SPEC SHEET

Columba


Art. no: 5712-04-3-ddd



Lighting Solutions

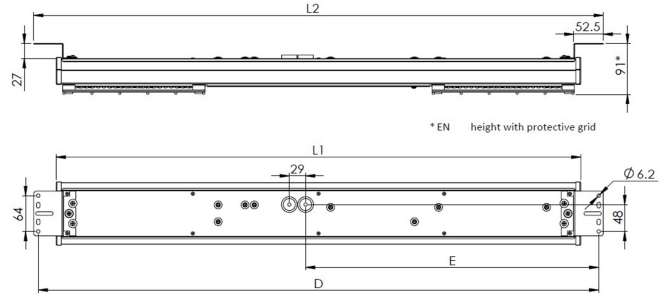

L1, mm	L2, mm	D, mm	E, mm	weight, kg
935	1015	999	523	1.50
1190	1270	1254	87	2.20
1444	1524	1508	779	2.80
1953	2033	2017	1032	4.10



## Columba



Art. no: 5712-04-3-ddd

### LIGHT TECHNICAL

Lumen Output:	14805
Beam Angle:	90°x90°
CCT (Color Temperature):	4000
CRI / Ra:	80
Color Code:	840
MacAdam (SDCM):	3

### PRODUCT

Ingress Protection:	IP65
Impact Protection:	IK08
Operating Temperature [°C]:	-20 - 35
Lifetime [h]:	L80B50: 100 000
Color:	White
Length [mm]:	1190
Height [mm]:	80
Width [mm]:	114
Weight [kg]:	2,2

### ELECTRICAL DATA

Dimming:	DALI
Dimming Output Type:	Amplitude Modulation
System Power [W]:	86
System Voltage [V]:	230V 50Hz
Protection Class:	1
Max load pr circuit - B10:	6
Max load pr circuit - B16:	10
Max load pr circuit - C10:	10
Max load pr circuit - C16:	16
Leakage current [mA]:	0,46
Inrush current I <sub>max</sub> [A]:	33
Inrush current time [µs]:	280
Socket / Cap-Base:	N/A

### MOUNTING / CONNECTION

Cut-out [mm]:	NA
Mounting:	Surface, Suspended, Ceiling