





FDV SPEC SHEET

Ledline


Art. no: 805004-2-ddd



Lighting Solutions

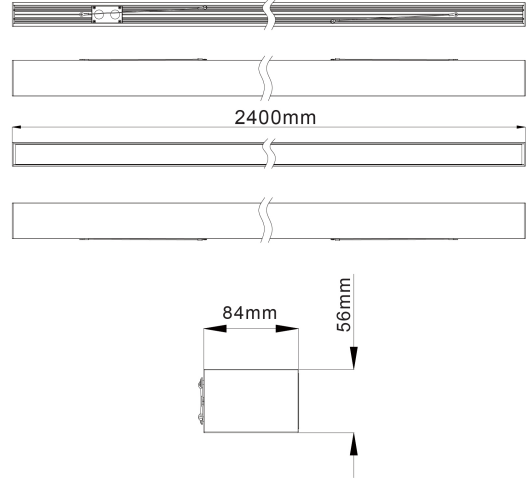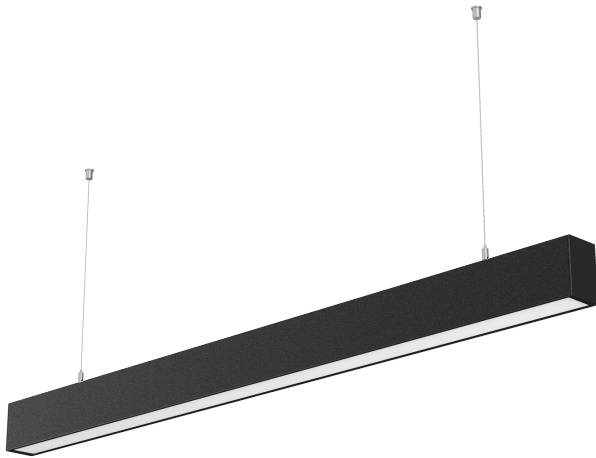

Ledline



Art. no: 805004-2-ddd

LIGHT TECHNICAL

| | |
|--------------------------|----------------|
| Lightsource Type: | LED (built in) |
| Lumen Output: | 5950 |
| Lumen LED (tc=25): | 7100 |
| Beam Angle: | 110 |
| CCT (Color Temperature): | 3000 |
| CRI / Ra: | 80 |
| Color Code: | 830 |
| Lens (Diffuser): | Opal |

MOUNTING / CONNECTION

| | |
|-------------|------------------------------------|
| Connection: | LEDLine 5-pin |
| Mounting: | Recessed, Surface, Ceiling, Pendan |

ELECTRICAL DATA

| | |
|--------------------------------------|-----------|
| Dimming: | DALI |
| System Power [W]: | 75 |
| System Voltage [V]: | 230V 50Hz |
| Protection Class: | 2 |
| Max load pr circuit - B10: | 9 |
| Max load pr circuit - B16: | 14 |
| Max load pr circuit - C10: | 10 |
| Max load pr circuit - C16: | 17 |
| Leakage current [mA]: | 0,25 |
| Inrush current I _{max} [A]: | 60 |
| Inrush current time [μs]: | 3,5 |
| Socket / Cap-Base: | N/A |
| Current Output [mA]: | 840 |
| Voltage Forward Min [V]: | 32 |
| Voltage Forward Max [V]: | 48 |



FDV SPEC SHEET

Ledline

Art. no: 805004-2-ddd



Lighting Solutions

PRODUCT

| | |
|---------------------|-----------------|
| Ingress Protection: | IP40 |
| Impact Protection: | IK08 |
| Lifetime [h]: | L80B10: 100 000 |
| Color: | Black |
| Length [mm]: | 2400 |
| Height [mm]: | 84 |
| Width [mm]: | 56 |
| Weight [kg]: | 6,6 |