



PRODUCT SHEET



Panel

Art. no: 0320-4-02-3



Lighting Solutions

Panel

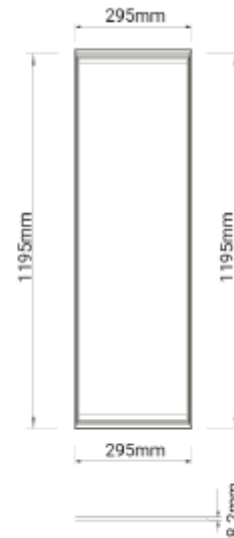

| SPECIFICATIONS | |
|--------------------------|---------------------|
| Lightsource Type: | LED (built in) |
| System Power [W]: | 36W |
| CCT (Color Temperature): | 3000K |
| CRI / Ra: | 80 |
| Lumen Output: | 4165lm |
| Lumen LED (tc=25): | 4500lm |
| Beam Angle: | 110° |
| Lens (Diffuser): | Micropris. |
| Dimming: | Depending on Driver |
| System Voltage [V]: | 230V 50Hz |
| Connection: | EPN0024 |
| Mounting: | Recessed, Ceiling |
| Lifetime [h]: | L80B50: 100 000h |
| Lumen/W: | 116lm/W |
| Color: | White |
| Length [mm]: | 1195mm |
| Height [mm]: | 8,6mm |
| Width [mm]: | 295mm |
| Weight [kg]: | 2,6kg |

Panel LED is a light fixture for interior use. It is constructed for fitting in to suspended ceilings. Panel LEDs can be installed as a pendant or mounted on ceiling surfaces. The Panel LED has an opal or micro prismatic diffuser. Choose between ON/OFF, Phase-Cut or DALI2 (CLO, Corridor, Push dim and Ready2mains) driver. See accessories for detailed information.