




## FDV SPEC SHEET

Panel Tunable White

Art. no: 0392-02-3



Lighting Solutions

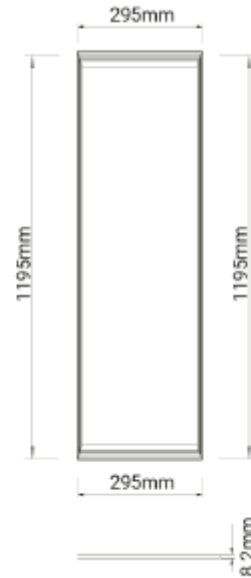

# Panel Tunable White



Art. no: 0392-02-3

LIGHT TECHNICAL	
Lightsource Type:	LED (built in)
Lumen Output:	3868
Lumen LED (tc=25):	4250
Beam Angle:	110
CCT (Color Temperature):	2700-6500K
CRI / Ra:	80
Color Code:	827-865
Lens (Diffuser):	Micropris.
UGR (<=):	19
MOUNTING / CONNECTION	
Connection:	Cable 0.5m

ELECTRICAL DATA	
Dimming:	Depending on Driver
System Voltage [V]:	230V 50Hz
Protection Class:	3
Max load pr circuit - B10:	10
Max load pr circuit - B16:	16
Max load pr circuit - C10:	16
Max load pr circuit - C16:	26
Leakage current [mA]:	0,5
Inrush current I <sub>max</sub> [A]:	26
Inrush current time [μs]:	224
Current Output [mA]:	900



## FDV SPEC SHEET

Panel Tunable White

Art. no: 0392-02-3



*Lighting Solutions*

### PRODUCT

Ingress Protection:	IP40
Impact Protection:	IK05
Lifetime [h]:	L80B50: 100 000
Color:	White
Length [mm]:	1195
Height [mm]:	8,2
Width [mm]:	295