





FDV SPEC SHEET

Stream C

Art. no: 0451-02



Lighting Solutions

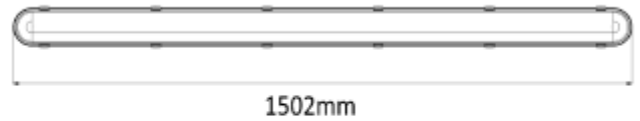

Stream C



Art. no: 0451-02

LIGHT TECHNICAL

| | |
|--------------------------|----------------|
| Lightsource Type: | LED (built in) |
| Lumen Output: | 6626 |
| Lumen LED (tc=25): | 7400 |
| Beam Angle: | 120 |
| CCT (Color Temperature): | 4000 |
| CRI / Ra: | 80 |
| Color Code: | 840 |
| Lens (Diffuser): | Opal |

PRODUCT

| | |
|-----------------------------|-----------------|
| Ingress Protection: | IP65 |
| Impact Protection: | IK08 |
| Operating Temperature [°C]: | -20 - 40 |
| Lifetime [h]: | L80B10: 100 000 |
| Color: | Grey |
| Length [mm]: | 1502 |
| Height [mm]: | 81 |
| Width [mm]: | 96 |
| Weight [kg]: | 2,6 |

ELECTRICAL DATA

| | |
|--------------------------------------|-----------|
| Dimming: | None |
| System Power [W]: | 51 |
| System Voltage [V]: | 230V 50Hz |
| Protection Class: | 1 |
| Max load pr circuit - B10: | 16 |
| Max load pr circuit - B16: | 32 |
| Max load pr circuit - C10: | 20 |
| Max load pr circuit - C16: | 40 |
| Leakage current [mA]: | 0,45 |
| Inrush current I _{max} [A]: | 13 |
| Inrush current time [µs]: | 50 |

MOUNTING / CONNECTION

| | |
|------------------------------------|--------------------|
| Connection: | Terminalx2 |
| Through-wiring (mm ²): | 5x2,5 |
| Mounting: | Surface, Suspended |