


Silindir 70



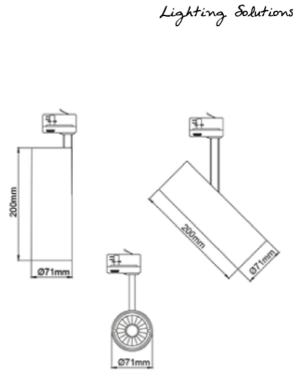

NORLUX

The Silindir uses the possibilities created by new technology. The LED driver is mounted inside the luminare body. This gives us a slim design combined with a powerful light output that can be easily adjusted in all directions to meet all needs. Cylinder can be tilted 90 degrees and rotated 350 degrees its own axis.



PECIFICATIONS	
ightsource Type:	LED (built in)
System Power [W]:	19W
CCT (Color Temperature):	2700K
CRI / Ra:	90
Beam Angle:	30
Lens (Diffuser):	Clear
Dimming:	DALI
System Voltage [V]:	230V 50Hz
Connection:	Track 3-Circuit+dim
Mounting:	Track, Ceiling
Lifetime [h]:	L80B10: 100 000h
MacAdam (SDCM):	3
Color:	White
Length [mm]:	71mm
Height [mm]:	215mm
Width [mm]:	71mm
Weight [kg]:	1kg