




## FDV SPEC SHEET

Silindir 70

Art. no: 101090-7-40-3

# NORLUX®

Lighting Solutions

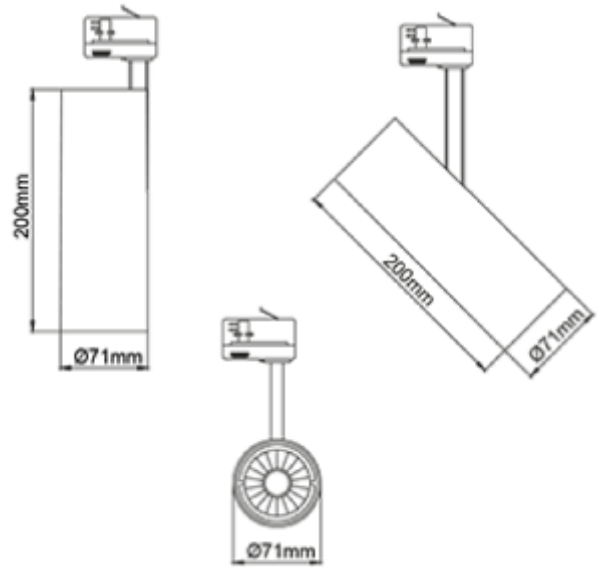

## Silindir 70



A<sup>+</sup>

Art. no: 101090-7-40-3

### LIGHT TECHNICAL

|                          |                |
|--------------------------|----------------|
| Lightsource Type:        | LED (built in) |
| Lumen LED (tc=25):       | 2500           |
| Beam Angle:              | 40°            |
| CCT (Color Temperature): | 2700           |
| CRI / Ra:                | 90             |
| Color Code:              | 927            |
| MacAdam (SDCM):          | 3              |
| Lens (Diffuser):         | Clear          |

### MOUNTING / CONNECTION

|             |                 |
|-------------|-----------------|
| Connection: | Track 3-Circuit |
| Mounting:   | Track, Ceiling  |

### ELECTRICAL DATA

|                     |           |
|---------------------|-----------|
| Dimming:            | None      |
| System Power [W]:   | 20        |
| System Voltage [V]: | 230V 50Hz |
| Protection Class:   | 1         |



## FDV SPEC SHEET

Silindir 70

Art. no: 101090-7-40-3



*Lighting Solutions*

### PRODUCT

|                     |                 |
|---------------------|-----------------|
| Ingress Protection: | IP20            |
| Lifetime [h]:       | L80B10: 100 000 |
| Color:              | White           |
| Length [mm]:        | 71              |
| Height [mm]:        | 215             |
| Width [mm]:         | 71              |
| Weight [kg]:        | 1               |