



Bladeline Z






SPECIFICATIONS

Lightsource Type:	LED (built ir
System Power [W]:	42W
CCT (Color Temperature):	4000K
CRI / Ra:	80
Lumen Output:	7544lm
Lumen LED (tc=25):	7800lm
Beam Angle:	Wide
Dimming:	DALI2
System Voltage [V]:	230V 50Hz
Connection:	QuickConne
Mounting:	Surface, Cei
Lifetime [h]:	L80B50: 100
Lumen/W:	179lm/W
UGR (<=):	20
MacAdam (SDCM):	3
Through-wiring (mm2):	5x2,5
Color:	Aluminium
Length [mm]:	1245mm
Height [mm]:	70mm
Width [mm]:	90mm
Weight [kg]:	4kg

LED (built in)
42W
4000K
80
7544lm
7800lm
Wide
DALI2
230V 50Hz
QuickConnect
Surface, Ceiling
L80B50: 100 000h
179lm/W
20
3
5x2,5
Aluminium
1245mm
70mm
90mm
4kg

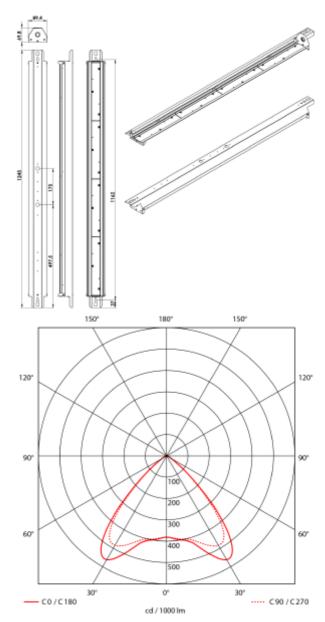

Bladeline Z is a highly efficient LED luminare with up to 179lm/w. Due to fact that it may be installed surface mounted on the ceiling or on electrical tracks makes it highly flexible. Can be opened without using tools and it has the electric connectors on quick fit clamps. The Bladeline Z is made from galvanized steel with medium or wide beam (75° and 90°) optic in 42W or 75W versions.

A