





FDV SPEC SHEET

Bladeline Z

Art. no: 101218-00-1



Lighting Solutions

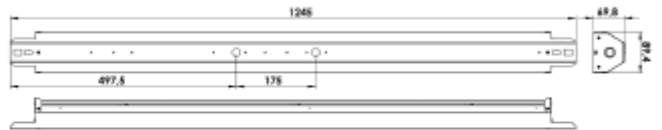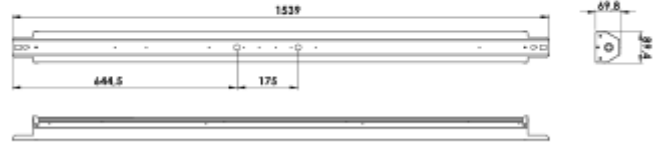

Bladeline Z



Art. no: 101218-00-1

LIGHT TECHNICAL

Lightsource Type:	LED (built in)
Lumen Output:	13082
Lumen LED (tc=25):	13200
Beam Angle:	Medium
CCT (Color Temperature):	4000
CRI / Ra:	80
Color Code:	840
MacAdam (SDCM):	3
Lens (Diffuser):	Lens
UGR (<=):	19

ELECTRICAL DATA

Dimming:	None
Flickerfree:	Yes
System Power [W]:	75
System Voltage [V]:	230V 50Hz
Protection Class:	1
Max load pr circuit - B10:	9
Max load pr circuit - B16:	15
Max load pr circuit - C10:	16
Max load pr circuit - C16:	26
Leakage current [mA]:	0,3
Inrush current I _{max} [A]:	39
Inrush current time [µs]:	166
Socket / Cap-Base:	N/A
Current Output [mA]:	500
Voltage Forward Min [V]:	140,6
Voltage Forward Max [V]:	142,6



FDV SPEC SHEET

Bladeline Z

Art. no: 101218-00-1



Lighting Solutions

PRODUCT

Ingress Protection:	IP23
Impact Protection:	IK05
Operating Temperature [°C]:	0 - 40
Lifetime [h]:	L80B50: 100 000
Color:	Aluminium
Length [mm]:	1539
Height [mm]:	70
Width [mm]:	90
Weight [kg]:	3,4
Housing Material :	Aluminium

MOUNTING / CONNECTION

Connection:	Quickconnectx2
Through-wiring (mm2):	5x2,5
Mounting:	Surface, Ceiling