




FDV SPEC SHEET
 Sircular Pendant
 Art. no: 101303-120-2-ddd



Sircular Pendant

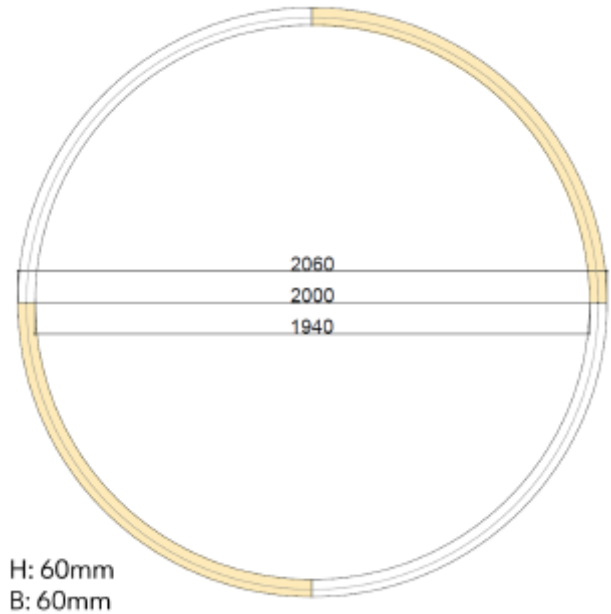

Art. no: 101303-120-2-ddd

LIGHT TECHNICAL	
Lightsource Type:	LED (built in)
Lumen Output:	10056
Lumen LED (tc=25):	12000
Beam Angle:	120°
CCT (Color Temperature):	3000
CRI / Ra:	80
Color Code:	830
MacAdam (SDCM):	5
Lens (Diffuser):	Opal
UGR (<=):	22

MOUNTING / CONNECTION	
Connection:	Cable 3m
Mounting:	Ceiling, Pendant

ELECTRICAL DATA	
Dimming:	DALI2
System Power [W]:	120
System Voltage [V]:	230V 50Hz
Protection Class:	1
Max load pr circuit - B16:	13
Max load pr circuit - C16:	15
Leakage current [mA]:	1,5
Inrush current I _{max} [A]:	60
Inrush current time [µs]:	130



FDV SPEC SHEET

Sircular Pendant

Art. no: 101303-120-2-ddd



Lighting Solutions

PRODUCT

Ingress Protection:	IP20
Impact Protection:	IK09
Operating Temperature [°C]:	-30 - 55
Lifetime [h]:	L80B20: 50 000
Color:	Black
Length [mm]:	60
Height [mm]:	60
Diameter [mm]:	2060
Weight [kg]:	12,5
Housing Material :	Aluminium
Diffuser Material:	Polycarbonate