




FDV SPEC SHEET

Silindir 50 Short

Art. no: 101390-7-30-2



Lighting Solutions

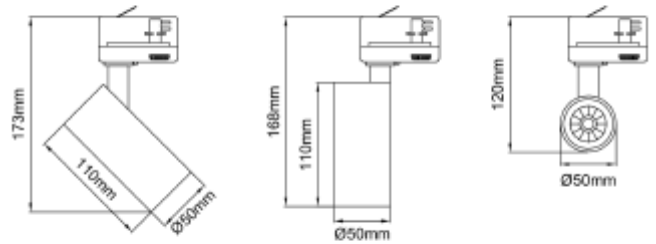

Silindir 50 Short



Art. no: 101390-7-30-2

LIGHT TECHNICAL

| | |
|--------------------------|-------|
| Lumen Output: | 525 |
| Lumen LED (tc=25): | 850 |
| Beam Angle: | 30° |
| CCT (Color Temperature): | 2700 |
| CRI / Ra: | 90 |
| Color Code: | 927 |
| MacAdam (SDCM): | 3 |
| Lens (Diffuser): | Clear |

MOUNTING / CONNECTION

| | |
|-------------|-----------------|
| Connection: | Track 3-Circuit |
| Mounting: | Track, Ceiling |

PRODUCT

| | |
|---------------------|-------|
| Ingress Protection: | IP20 |
| Color: | Black |
| Length [mm]: | 110 |
| Width [mm]: | 50 |
| Weight [kg]: | 0,3 |

ELECTRICAL DATA

| | |
|--------------------------------------|-----------|
| Dimming: | None |
| System Power [W]: | 7 |
| System Voltage [V]: | 230V 50Hz |
| Protection Class: | 1 |
| Max load pr circuit - B10: | 79 |
| Max load pr circuit - B16: | 127 |
| Max load pr circuit - C10: | 79 |
| Max load pr circuit - C16: | 127 |
| Inrush current I _{max} [A]: | 15 |
| Inrush current time [µs]: | 30 |
| Current Output [mA]: | 180 |