




FDV SPEC SHEET

Gyre Up&Down 800lm 830 24° 10W BK

Art. no: 101520-24-2



Lighting Solutions

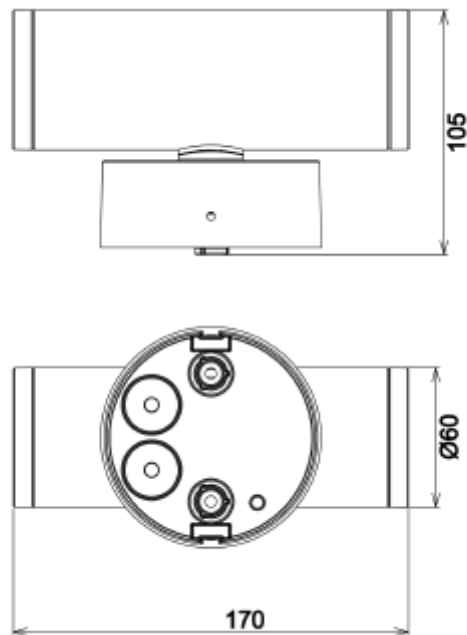

Gyre Up&Down 800lm 830 24° 10W BK



Art. no: 101520-24-2

LIGHT TECHNICAL

Lumen Output:	760
Lumen LED (tc=25):	800
Beam Angle:	24°
CCT (Color Temperature):	3000
CRI / Ra:	80
Color Code:	830
MacAdam (SDCM):	3
Lens (Diffuser):	Clear

MOUNTING / CONNECTION

Connection:	QuickConnect
Mounting:	Wall

ELECTRICAL DATA

Dimming:	None
System Power [W]:	10
System Voltage [V]:	230V 50Hz
Protection Class:	1
Max load pr circuit - B10:	95
Max load pr circuit - B16:	152
Max load pr circuit - C10:	90
Max load pr circuit - C16:	152
Leakage current [mA]:	0,75
Inrush current I _{max} [A]:	6,2
Inrush current time [μs]:	65
Socket / Cap-Base:	N/A
Current Output [mA]:	230



FDV SPEC SHEET

Gyre Up&Down 800lm 830 24° 10W BK

Art. no: 101520-24-2



Lighting Solutions

PRODUCT

Ingress Protection:	IP65
Impact Protection:	IK06
Operating Temperature [°C]:	-20 - 40
Lifetime [h]:	L80B10: 50.000
Color:	Black
RAL:	RAL9005
Length [mm]:	105
Height [mm]:	170
Width [mm]:	60
Weight [kg]:	0,6