




FDV SPEC SHEET

Stream Y

Art. no: 102452-02-ddd



Lighting Solutions

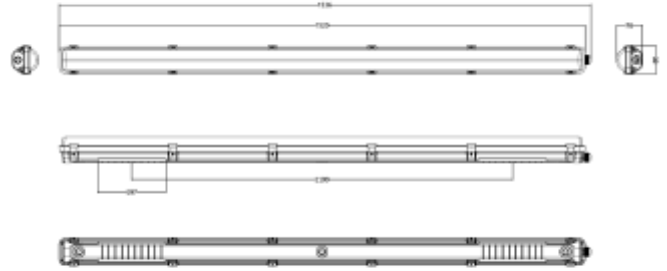

Stream Y



Art. no: 102452-02-ddd

LIGHT TECHNICAL

| | |
|--------------------------|----------------|
| Lightsource Type: | LED (built in) |
| Lumen Output: | 6600 |
| Lumen LED (tc=25): | 7200 |
| Beam Angle: | 120° |
| CCT (Color Temperature): | 4000 |
| CRI / Ra: | 80 |
| Color Code: | 840 |
| MacAdam (SDCM): | 3 |
| Lens (Diffuser): | PC Opal |

ELECTRICAL DATA

| | |
|------------------------------------|----------------------|
| Dimming: | DALI2 |
| Dimming Output Type: | Amplitude Modulation |
| Flicker metric (Pst LM) <: | 0,008 |
| Stroboscopic effect metric (SVM) < | 0,008 |
| System Power [W]: | 42 |
| System Voltage [V]: | 230V 50Hz |
| Protection Class: | 1 |
| Max load pr circuit - B10: | 13 |
| Max load pr circuit - B16: | 20 |
| Max load pr circuit - C10: | 21 |
| Max load pr circuit - C16: | 34 |
| Inrush current time [µs]: | 296 |
| Socket / Cap-Base: | N/A |
| Current Output [mA]: | 300mA |

MOUNTING / CONNECTION

| | |
|-----------------------|--------------------|
| Connection: | Terminalx2 |
| Through-wiring (mm2): | 5x2,5 |
| Mounting: | Surface, Suspended |



FDV SPEC SHEET

Stream Y

Art. no: 102452-02-ddd



Lighting Solutions

PRODUCT

| | |
|-----------------------------|-----------------|
| Ingress Protection: | IP65 |
| Impact Protection: | IK08 |
| Operating Temperature [°C]: | -20 - 40 |
| Lifetime [h]: | L80B10: 100 000 |
| Color: | Grey |
| Length [mm]: | 1536 |
| Height [mm]: | 80 |
| Width [mm]: | 76 |
| Housing Material : | Polycarbonate |