



PRODUCT SHEET


Uniplus Interior

Art. no: 103050-90-3



Lighting Solutions

Uniplus Interior

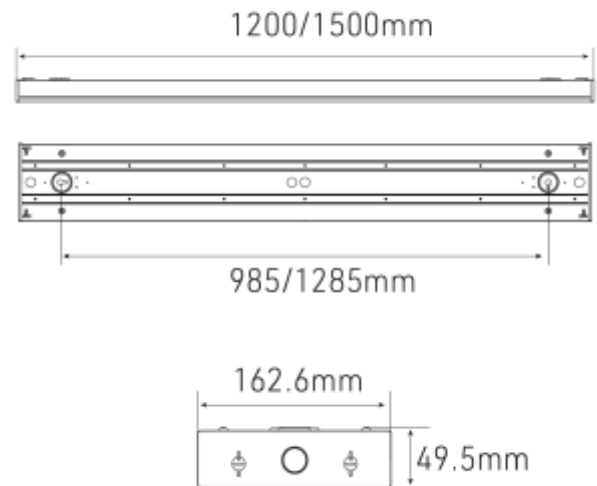

SPECIFICATIONS	
Lightsource Type:	LED (replaceable)
System Power [W]:	18/22/27/31W
CCT (Color Temperature):	3000K
CRI / Ra:	80
Lumen Output:	4500lm
Lumen LED (tc=25):	5000lm
Beam Angle:	90°
Lens (Diffuser):	Micropris.
Dimming:	None
Flickerfree:	Yes
System Voltage [V]:	230V 50Hz
Connection:	Quickconnectx2
Mounting:	Surface, Suspended, Ceiling
Lifetime [h]:	L80B10: 100 000h
Lumen/W:	140lm/W
UGR (<=):	19
MacAdam (SDCM):	3
Through-wiring (mm2):	5x2,5
Color:	White
Length [mm]:	1200mm
Height [mm]:	49,5mm
Width [mm]:	162,6mm
Weight [kg]:	2,8kg

Uniplus is a surface mounted luminaire with the latest technology and optics to ensure a high luminous efficiency and low glare.

-Low glare UGR19 -Up to 150lm/w -Easy and fast installation.

-Suspended installation (accessory) Efficiency can be adjusted by dip switch: 31W = 4500lm 27W = 3933lm (default setting) 23W = 3390lm 18W = 2700lm