




FDV SPEC SHEET

Tube Wall Single 2750lm 830 45° 21W IP65 Ø155x250mm DarkGrey

Art. no: 1075-45-1



Lighting Solutions

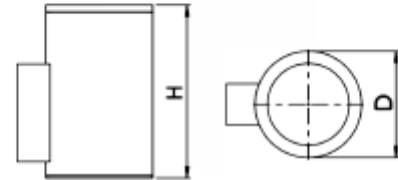

D, mm	H, mm
155	464
	250

Tube Wall Single 2750lm 830 45° 21W IP65 Ø155x250m



Art. no: 1075-45-1

LIGHT TECHNICAL

Lumen Output:	2055
Lumen LED (tc=25):	2779
Beam Angle:	45°
CCT (Color Temperature):	3000
CRI / Ra:	80
Color Code:	830
MacAdam (SDCM):	3
Lens (Diffuser):	None

MOUNTING / CONNECTION

Connection:	Terminal
Mounting:	Surface, Wall

ELECTRICAL DATA

Dimming:	None
System Power [W]:	21
System Voltage [V]:	230V 50Hz
Protection Class:	1
Max load pr circuit - B10:	31
Max load pr circuit - B16:	50
Max load pr circuit - C10:	52
Max load pr circuit - C16:	85
Inrush current I _{max} [A]:	5
Inrush current time [µs]:	50
Socket / Cap-Base:	N/A
Current Output [mA]:	500
Voltage Forward Min [V]:	31,2
Voltage Forward Max [V]:	36,8



FDV SPEC SHEET

Tube Wall Single 2750lm 830 45° 21W IP65 Ø155x250mm DarkGrey
Art. no: 1075-45-1



Lighting Solutions

PRODUCT

Ingress Protection:	IP65
Impact Protection:	IK08
Corrosion Class:	C3
Operating Temperature [°C]:	-25 - 40
Lifetime [h]:	L80B50: 35 000
Color:	Dark Grey
Length [mm]:	250
Width [mm]:	155
Weight [kg]:	2,2