




FDV SPEC SHEET

Caro 700lm 830 78° 16W BK IP65

Art. no: 1080-2



Lighting Solutions

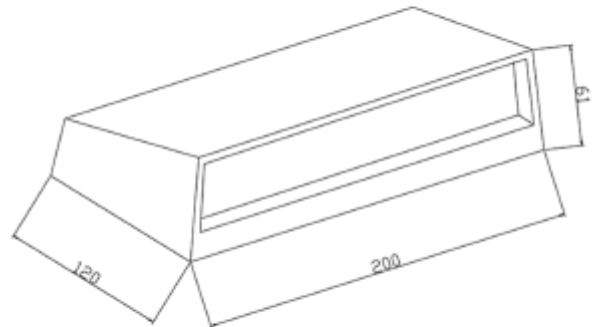

Caro 700lm 830 78° 16W BK IP65



Art. no: 1080-2

LIGHT TECHNICAL

Lumen Output:	670
Lumen LED (tc=25):	700
Beam Angle:	78°
CCT (Color Temperature):	3000
CRI / Ra:	80
Color Code:	830
Lens (Diffuser):	None
UGR (<=):	19

MOUNTING / CONNECTION

Connection:	Terminal
Mounting:	Surface, Wall

ELECTRICAL DATA

Dimming:	None
System Power [W]:	16
System Voltage [V]:	230V 50Hz
Protection Class:	1
Max load pr circuit - B10:	100
Max load pr circuit - B16:	150
Max load pr circuit - C10:	100
Max load pr circuit - C16:	150
Leakage current [mA]:	1
Inrush current I _{max} [A]:	2,6
Inrush current time [µs]:	0,6
Socket / Cap-Base:	N/A
Current Output [mA]:	350



FDV SPEC SHEET

Caro 700lm 830 78° 16W BK IP65

Art. no: 1080-2



Lighting Solutions

PRODUCT

Ingress Protection:	IP65
Lifetime [h]:	L80B50: 50 000
Color:	Black
Length [mm]:	208
Height [mm]:	104
Width [mm]:	53
Weight [kg]:	0,6