





FDV SPEC SHEET
 Halo Pendant Dimmable
 Art. no: 1128-2-120-2

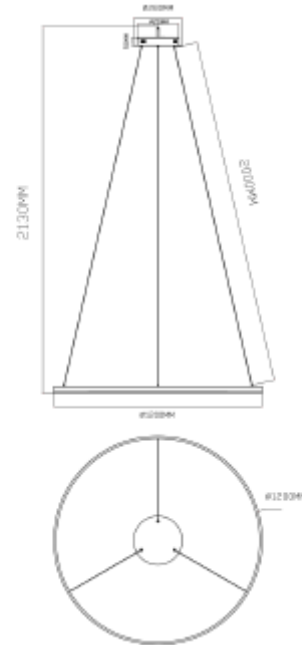

Halo Pendant Dimmable



Art. no: 1128-2-120-2

LIGHT TECHNICAL	
Lightsource Type:	LED (built in)
Lumen Output:	2200
Lumen LED (tc=25):	5050
Beam Angle:	120
CCT (Color Temperature):	3000
CRI / Ra:	80
Color Code:	830
MacAdam (SDCM):	6
Lens (Diffuser):	Frosted
UGR (<=):	16

MOUNTING / CONNECTION	
Connection:	18i3 Quick connection
Mounting:	Ceiling, Pendant

ELECTRICAL DATA	
Dimming:	Phase-Cut
Dimming Output Type:	Amplitude Modulation
Dimming Phasecut Type:	Leading / Trailing edge
Flicker metric (Pst LM) <:	1
Stroboscopic effect metric (SVM) <	0,4
System Power [W]:	43
System Voltage [V]:	230V 50Hz
Protection Class:	2
Max load pr circuit - B10:	35
Max load pr circuit - B16:	57
Max load pr circuit - C10:	35
Max load pr circuit - C16:	57
Leakage current [mA]:	5
Inrush current I _{max} [A]:	5
Inrush current time [µs]:	100
Current Output [mA]:	1050
Voltage Forward Min [V]:	2,6
Voltage Forward Max [V]:	3,4



FDV SPEC SHEET

Halo Pendant Dimmable

Art. no: 1128-2-120-2



Lighting Solutions

PRODUCT

Ingress Protection:	IP20
Operating Temperature [°C]:	-20 - 45
Lifetime [h]:	L80B10: 100 000
Color:	Black
Length [mm]:	1200
Height [mm]:	34
Width [mm]:	1200
Weight [kg]:	3