



FDV SPEC SHEET


Leila

Art. no: 15072-01E-3-ddd



Lighting Solutions

 190mm

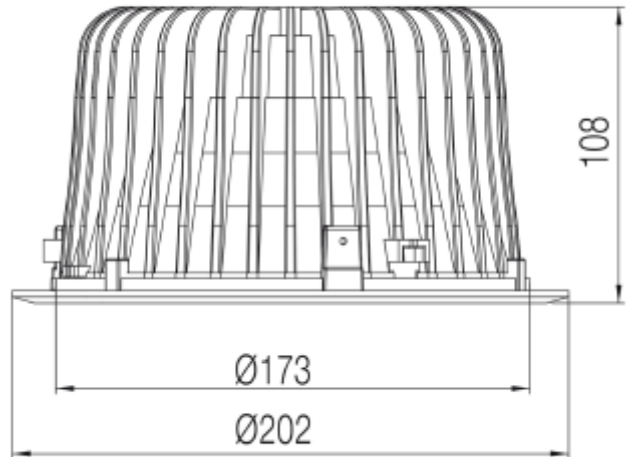

Leila



Art. no: 15072-01E-3-ddd

LIGHT TECHNICAL

Lightsource Type:	LED (built in)
Lumen Output:	1877
Lumen LED (tc=25):	2365
Beam Angle:	70
CCT (Color Temperature):	3000
CRI / Ra:	80
Color Code:	830
MacAdam (SDCM):	3
Lens (Diffuser):	Opal



FDV SPEC SHEET

Leila

Art. no: 15072-01E-3-ddd



MOUNTING / CONNECTION

Emergency lumen out [lm]:	375
Connection:	18i5 DALI Quick connection
Cut-out [mm]:	Ø190
Mounting:	Recessed, Ceiling

PRODUCT

To be recessed in insulation:	No
Ingress Protection:	IP40
Lifetime [h]:	L80B10: 100 000
Color:	White
Height [mm]:	102
Width [mm]:	205
Weight [kg]:	1,2

ELECTRICAL DATA

UGR (<=):	22
Dimming:	DALI
Dimming Output Type:	Amplitude Modulation
System Power [W]:	24
System Voltage [V]:	230V 50Hz
Protection Class:	3
Max load pr circuit - B10:	19
Max load pr circuit - B16:	32
Max load pr circuit - C10:	31
Max load pr circuit - C16:	53
Leakage current [mA]:	0,15
Inrush current I _{max} [A]:	26
Inrush current time [µs]:	151
Socket / Cap-Base:	N/A
Current Output [mA]:	600
Voltage Forward Min [V]:	36
Voltage Forward Max [V]:	38
Emergency light [h]:	3 hours
Emergency light testing:	Manual
Dimming Output Type:	Amplitude Modulation