





FDV SPEC SHEET
Torres Mini Fixed
Art. no: 17020-7-24-3-ddd



105mm

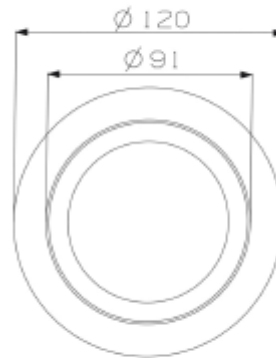

Torres Mini Fixed



Art. no: 17020-7-24-3-ddd

LIGHT TECHNICAL

Lightsource Type:	LED (built in)
Lumen LED (tc=25):	3200
Beam Angle:	24°
CCT (Color Temperature):	3000
CRI / Ra:	80
Color Code:	830
MacAdam (SDCM):	3
Lens (Diffuser):	Clear

MOUNTING / CONNECTION

Connection:	18i5 Quick connection
Cut-out [mm]:	Ø105
Mounting:	Recessed, Ceiling

ELECTRICAL DATA

Dimming:	DALI
System Power [W]:	23
System Voltage [V]:	230V 50Hz
Protection Class:	2
Max load pr circuit - B10:	55
Max load pr circuit - B16:	90
Max load pr circuit - C10:	65
Max load pr circuit - C16:	100
Inrush current I _{max} [A]:	8
Inrush current time [µs]:	100
Socket / Cap-Base:	N/A
Current Output [mA]:	600
Voltage Forward Min [V]:	31,7
Voltage Forward Max [V]:	36,3



FDV SPEC SHEET

Torres Mini Fixed

Art. no: 17020-7-24-3-ddd



Lighting Solutions

PRODUCT

To be recessed in insulation:	No
Ingress Protection:	IP20
Color:	White
Height [mm]:	60
Width [mm]:	120
Weight [kg]:	0,45