




FDV SPEC SHEET

Situla 3200lm 830 45° 35W WH w/o driver
Art. no: 2103-45-3



Lighting Solutions

205-220mm

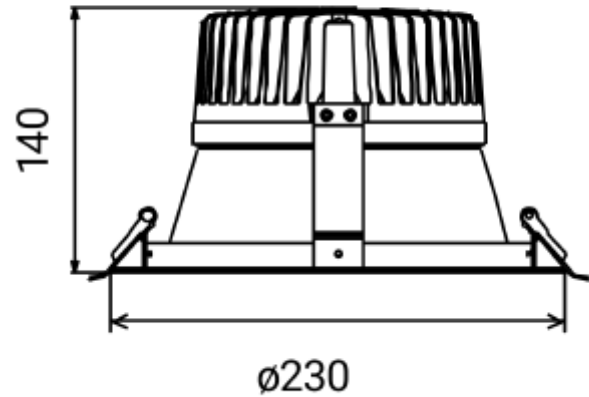

Situla 3200lm 830 45° 35W WH w/o driver



Art. no: 2103-45-3

LIGHT TECHNICAL

Lightsource Type:	LED (built in)
Lumen Output:	3141
Lumen LED (tc=25):	3200
Beam Angle:	45°
CCT (Color Temperature):	3000
CRI / Ra:	80
Color Code:	830
MacAdam (SDCM):	3
Lens (Diffuser):	Clear

MOUNTING / CONNECTION

Connection:	Depending on driver
Cut-out [mm]:	Ø205-Ø220
Mounting:	Recessed, Ceiling

ELECTRICAL DATA

Dimming:	Depending on Driver
System Power [W]:	35
System Voltage [V]:	230V 50Hz
Protection Class:	2
Socket / Cap-Base:	N/A
Current Output [mA]:	800
Voltage Forward Min [V]:	27
Voltage Forward Max [V]:	40



FDV SPEC SHEET

Situla 3200lm 830 45° 35W WH w/o driver

Art. no: 2103-45-3



Lighting Solutions

PRODUCT

To be recessed in insulation:	No
Ingress Protection:	IP20
Impact Protection:	IK06
Lifetime [h]:	L80B10: 50.000
Color:	White
Height [mm]:	140
Width [mm]:	230