




## FDV SPEC SHEET


Panel Relax  
Art. no: 2110-03-3



Lighting Solutions

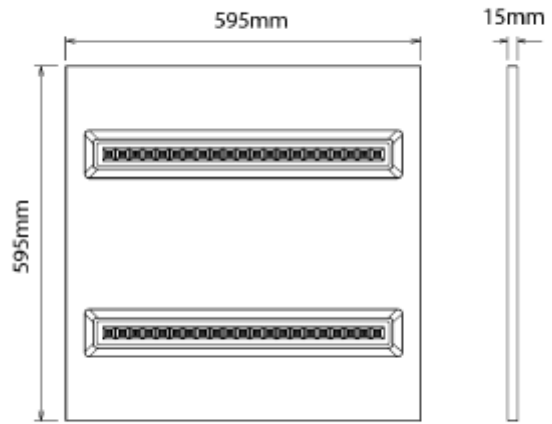

# Panel Relax



Art. no: 2110-03-3

### LIGHT TECHNICAL

Lightsource Type:	LED (built in)
Lumen Output:	3550 (4000K)
Lumen LED (tc=25):	3600
Beam Angle:	90°
CCT (Color Temperature):	3/4/5700
CRI / Ra:	80
Color Code:	830/840/857
MacAdam (SDCM):	3
UGR (<=):	19

### MOUNTING / CONNECTION

Connection:	Depending on driver
Mounting:	Recessed, Ceiling

### ELECTRICAL DATA

Dimming:	Depending on Driver
System Power [W]:	35
System Voltage [V]:	230V 50Hz
Protection Class:	2
Max load pr circuit - B10:	14
Max load pr circuit - B16:	24
Max load pr circuit - C10:	24
Max load pr circuit - C16:	40
Inrush current I <sub>max</sub> [A]:	25
Inrush current time [μs]:	150
Socket / Cap-Base:	N/A
Current Output [mA]:	900
Voltage Forward Min [V]:	28
Voltage Forward Max [V]:	40



## FDV SPEC SHEET

Panel Relax

Art. no: 2110-03-3



*Lighting Solutions*

### PRODUCT

Ingress Protection:	IP20
Operating Temperature [°C]:	-20 - 40
Lifetime [h]:	L80B50: 50 000
Color:	White
Length [mm]:	595
Height [mm]:	15
Width [mm]:	595
Weight [kg]:	3,5