NORLUX®
Lighting Solutions

Phoenix

IP20 230V 50Hz IK06

A⁺
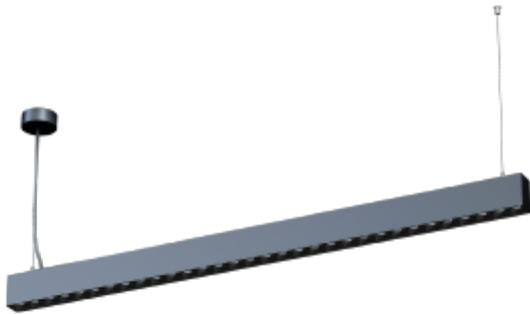
SPECIFICATIONS

Lightsource Type:	LED (built in)
System Power [W]:	60W
CCT (Color Temperature):	3000K
CRI / Ra:	80
Lumen Output:	5710lm
Lumen LED (tc=25):	6000lm
Beam Angle:	140° / 80°
Dimming:	DALI
System Voltage [V]:	230V 50Hz
Connection:	Cable 3m
Mounting:	Ceiling, Pendant
Lifetime [h]:	L80B10: 100 000h
Lumen/W:	100lm/W
UGR (<=):	10
MacAdam (SDCM):	3
Color:	Black
Length [mm]:	1285mm
Height [mm]:	76mm
Width [mm]:	48mm

cd/klm
— C0-C180
— C90-C270
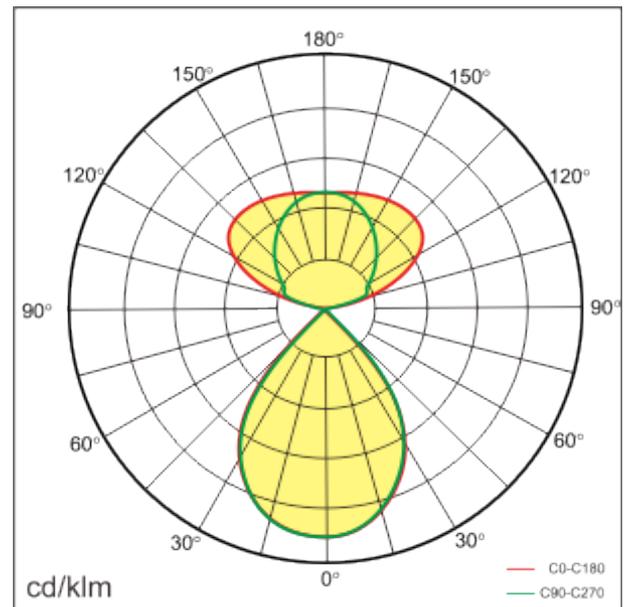
The Phoenix is a linear LED luminaire with up- and down light for pending down in indoor areas. The light distribution is 2000 lumen upwards with a 140° reflector and 2000 lumens downwards with a 80° reflector. It is made from durable aluminium for easy care. The color temperature is 3000 Kelvin and the reflectors secures a pleasant light. 3m wire.