




Tania Mini Basic



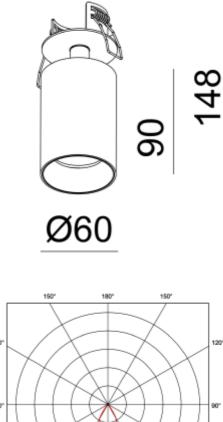

1 51mm

| | 1 | 90° | 180" | 150* | | |
|------|---------------------------------|-----|-------------------|------|-----------------|------|
| 120* | \prec | X | | | X | 120* |
| 90* | $\left(\left(\right) \right)$ | Q | | Ð | $\left.\right)$ | 90° |
| 60* | \prec | X | 1200 1600 | X | \succ | 60° |
| _ | C0/C180 | 0° | 0* d / 1000 im | 30* | C90/C | 270 |

Tania Basic is a recessed spotlight that can be tilted and rotated. Available in white and black color. Gold frontring can be bought seperately.

| CE | 220 230V 50Hz |
|-----------|---------------|
|-----------|---------------|

SPECIFICATIONS Lightsource Type:

| Lightsource Type: | LED (built in) |
|-------------------------------|-------------------|
| System Power [W]: | 14,5W |
| CCT (Color Temperature): | 3000K |
| CRI / Ra: | 90 |
| Lumen Output: | 1475lm |
| Lumen LED (tc=25): | 1550lm |
| Beam Angle: | 18° |
| Lens (Diffuser): | Clear |
| Dimming: | Phase-Cut |
| Flickerfree: | Yes |
| System Voltage [V]: | 230V 50Hz |
| Connection: | Terminal |
| Mounting: | Recessed, Ceiling |
| Cut-out [mm]: | Ø51mm |
| Lifetime [h]: | L80B10: 55 000h |
| Lumen/W: | 101lm/W |
| Color: | Black |
| Length [mm]: | 90mm |
| Diameter [mm]: | 60mm |
| To be recessed in insulation: | Not applicable |
| | |

A** - A