



FDV SPEC SHEET


Tania Mini Basic
Art. no: 3561-3-18-2



Lighting Solutions



51mm

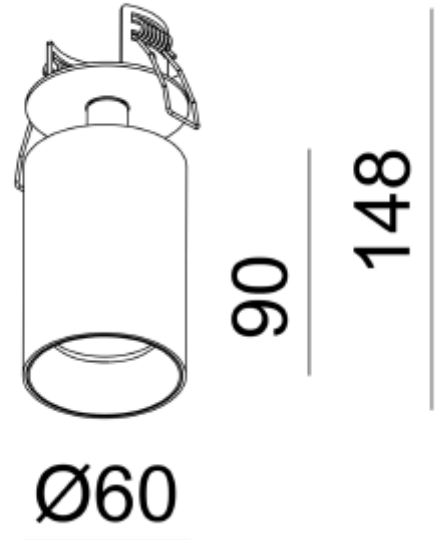

Tania Mini Basic



Art. no: 3561-3-18-2

LIGHT TECHNICAL

Lightsource Type:	LED (built in)
Lumen Output:	1050
Lumen LED (tc=25):	1550
Beam Angle:	18°
CCT (Color Temperature):	2700
CRI / Ra:	90
Color Code:	927
Lens (Diffuser):	Clear

MOUNTING / CONNECTION

Connection:	Terminal
Cut-out [mm]:	Ø51
Mounting:	Recessed, Ceiling

ELECTRICAL DATA

Dimming:	Phase-Cut
Dimming Phasecut Type:	Leading / Trailing edge
Flickerfree:	Yes
Flicker metric (Pst LM) <:	1
Stroboscopic effect metric (SVM) <:	0,4
System Power [W]:	14,5
System Voltage [V]:	230V 50Hz
Protection Class:	1
Max load pr circuit - C10:	125
Max load pr circuit - C16:	200
Inrush current time [µs]:	100
Current Output [mA]:	350
Dimming Phasecut Type:	Leading / Trailing edge



FDV SPEC SHEET

Tania Mini Basic

Art. no: 3561-3-18-2



Lighting Solutions

PRODUCT

To be recessed in insulation:	Not applicable
Ingress Protection:	IP20
Operating Temperature [°C]:	-20 - 40
Lifetime [h]:	L80B10: 55 000
Color:	Black
Length [mm]:	90
Diameter [mm]:	60
Housing Material :	Aluminium
Housing Material :	Aluminium