




FDV SPEC SHEET
 Benu Office DALI
 Art. no: 3730-110-3-ddd



Benu Office DALI

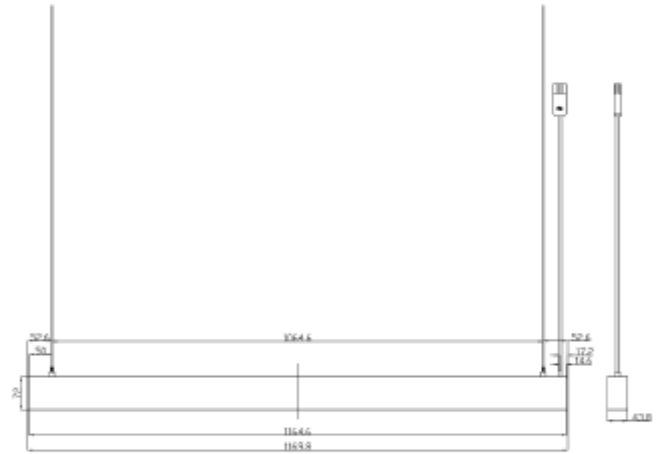

Art. no: 3730-110-3-ddd

LIGHT TECHNICAL

| | |
|--------------------------|----------------|
| Lightsource Type: | LED (built in) |
| Lumen Output: | 6520 |
| Lumen LED (tc=25): | 7200 |
| Beam Angle: | 110° / 75° |
| CCT (Color Temperature): | 3000 |
| CRI / Ra: | 80 |
| Color Code: | 830 |
| MacAdam (SDCM): | 3 |
| Lens (Diffuser): | Prismatic |
| UGR (<=): | 19 |

MOUNTING / CONNECTION

| | |
|-------------|-----------------------------|
| Connection: | 18i5 Quick connection |
| Mounting: | Suspended, Ceiling, Pendant |

ELECTRICAL DATA

| | |
|----------------------------------------|-----------|
| Dimming: | DALI2 |
| Flickerfree: | Yes |
| Standby power P _{sb} (W) <: | 0,5 |
| Flicker metric (P _{st} LM) <: | 1 |
| Stroboscopic effect metric (SVM) < | 0,4 |
| System Power [W]: | 50 |
| System Voltage [V]: | 230V 50Hz |
| Protection Class: | 1 |
| Max load pr circuit - B10: | 21 |
| Max load pr circuit - B16: | 32 |
| Max load pr circuit - C10: | 28 |
| Max load pr circuit - C16: | 37 |
| Leakage current [mA]: | 0,75 |
| Inrush current I _{max} [A]: | 30 |
| Inrush current time [µs]: | 110 |
| Socket / Cap-Base: | N/A |
| Current Output [mA]: | 1250 |
| Voltage Forward Min [V]: | 33 |
| Voltage Forward Max [V]: | 36 |



FDV SPEC SHEET

Benu Office DALI

Art. no: 3730-110-3-ddd



Lighting Solutions

PRODUCT

| | |
|---------------------|-----------------|
| Ingress Protection: | IP20 |
| Impact Protection: | IK02 |
| Lifetime [h]: | L80B10: 100 000 |
| Color: | White |
| Length [mm]: | 1170 |
| Height [mm]: | 76 |
| Width [mm]: | 43,8 |
| Weight [kg]: | 2,5 |