





## FDV SPEC SHEET

Benu Office Pullswitch

Art. no: 3733-110-2



Lighting Solutions

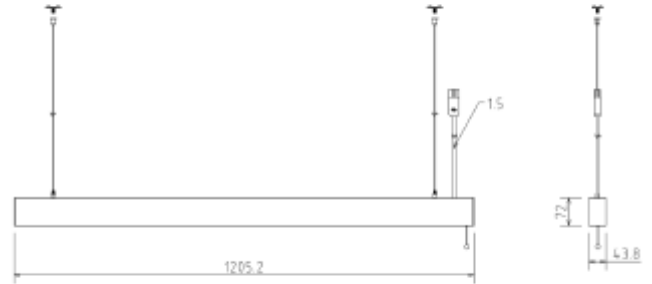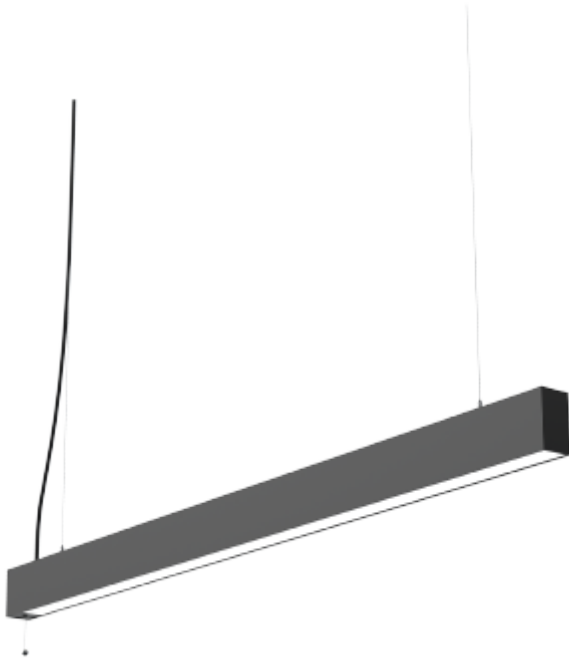

# Benu Office Pullswitch



Art. no: 3733-110-2

### LIGHT TECHNICAL

Lightsource Type:	LED (built in)
Lumen LED (tc=25):	7000
Beam Angle:	110° /75°
CCT (Color Temperature):	4000
CRI / Ra:	90
Color Code:	940
Lens (Diffuser):	Micropris.

### MOUNTING / CONNECTION

Connection:	18i3 Quick connection
Mounting:	Suspended, Ceiling, Pendant

### ELECTRICAL DATA

Dimming:	Pull Dim
Dimming Output Type:	Amplitude Modulation
Flickerfree:	Yes
Flicker metric (Pst LM) <:	0,002
Stroboscopic effect metric (SVM) <	0,003
System Power [W]:	50
System Voltage [V]:	230V 50Hz
Protection Class:	1
Max load pr circuit - B10:	28
Max load pr circuit - B16:	45
Max load pr circuit - C10:	28
Max load pr circuit - C16:	45
Leakage current [mA]:	0,7
Inrush current Imax [A]:	4,75
Inrush current time [µs]:	162
Socket / Cap-Base:	N/A



## FDV SPEC SHEET

Benu Office Pullswitch

Art. no: 3733-110-2



*Lighting Solutions*

### PRODUCT

Ingress Protection:	IP20
Impact Protection:	IK02
Operating Temperature [°C]:	-20 - 45
Lifetime [h]:	L80B10: 100 000
Color:	Black
Length [mm]:	1205
Height [mm]:	76
Width [mm]:	43,8
Weight [kg]:	2,5