




# PRODUCT SHEET

Colonel  
Art. no: 3913-2-03-2




Lighting Solutions

## Colonel

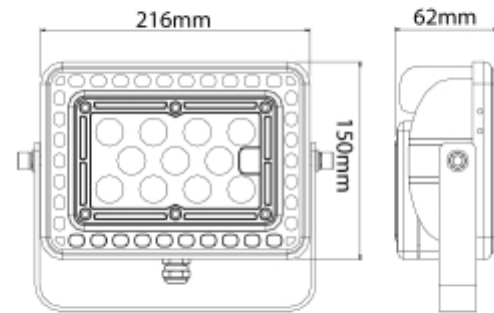

### SPECIFICATIONS

|                          |                               |
|--------------------------|-------------------------------|
| System Power [W]:        | 50W                           |
| CCT (Color Temperature): | 4000K                         |
| CRI / Ra:                | 80                            |
| Lumen Output:            | 6150lm                        |
| Lumen LED (tc=25):       | 8000lm                        |
| Beam Angle:              | 110x90°                       |
| Lens (Diffuser):         | Clear                         |
| Dimming:                 | 1-10V                         |
| System Voltage [V]:      | 230V 50Hz                     |
| Connection:              | Cable 2m                      |
| Mounting:                | Surface, Wall, Ceiling, Floor |
| Lifetime [h]:            | L80B50: 50 000h               |
| Lumen/W:                 | 123lm/W                       |
| Color:                   | Black/Brown                   |
| Length [mm]:             | 216mm                         |
| Height [mm]:             | 150mm                         |
| Width [mm]:              | 62mm                          |
| Weight [kg]:             | 1,8kg                         |

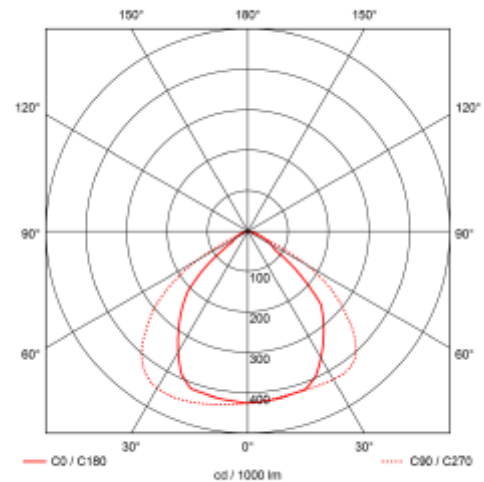

Colonel is a range of flood light fixtures mainly for outdoor use. The Colonel fixtures are made in robust die cast aluminum and are all IP66 classified. The fixtures are completely sealed and the vacuum inside prevents any condensation. The Colonel range is available in a number of models with wattage from 29W to 65W. The fixtures come with a mounting bracket and 50 cm power cord with an open end for easy installation.