




FDV SPEC SHEET

Anka

Art. no: 6701-04-1



Lighting Solutions

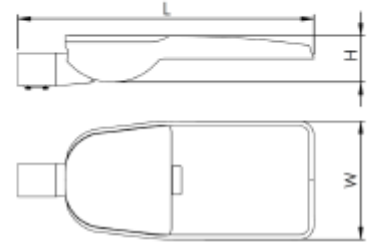

L, mm	W, mm	H, mm
525	250	102
625	288	102
776	320	102

Anka



Art. no: 6701-04-1

LIGHT TECHNICAL

Lightsource Type:	LED (built in)
Lumen Output:	6500
Lumen LED (tc=25):	7000
Beam Angle:	R4 Assymetric
CCT (Color Temperature):	4000
CRI / Ra:	70
Color Code:	740
MacAdam (SDCM):	3

MOUNTING / CONNECTION

Connection:	Terminal
Mounting:	Wall, Mast

ELECTRICAL DATA

Dimming:	None
System Power [W]:	54
System Voltage [V]:	230V 50Hz
Protection Class:	1
Max load pr circuit - B10:	31
Max load pr circuit - B16:	50
Max load pr circuit - C10:	32
Max load pr circuit - C16:	52
Inrush current I _{max} [A]:	5
Inrush current time [μs]:	50
Socket / Cap-Base:	N/A



FDV SPEC SHEET

Anka

Art. no: 6701-04-1



Lighting Solutions

PRODUCT

Ingress Protection:	IP66
Impact Protection:	IK09
Corrosion Class:	C3
Wind force (EPA) [m2]:	0,13
Operating Temperature [°C]:	-25 - 40
Lifetime [h]:	L90B10: 100 000
Color:	Grey
RAL:	RAL7022
Length [mm]:	525
Height [mm]:	102
Width [mm]:	250
Weight [kg]:	5