




## FDV SPEC SHEET

Anka

Art. no: 6703-04-1



Lighting Solutions

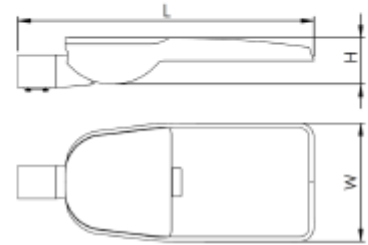

L, mm	W, mm	H, mm
525	250	102
625	288	102
776	320	102

# Anka



Art. no: 6703-04-1

### LIGHT TECHNICAL

Lightsource Type:	LED (built in)
Lumen Output:	8550
Lumen LED (tc=25):	9000
Beam Angle:	R4 Assymetric
CCT (Color Temperature):	4000
CRI / Ra:	70
Color Code:	740
MacAdam (SDCM):	3

### MOUNTING / CONNECTION

Connection:	Terminal
Mounting:	Wall, Mast

### ELECTRICAL DATA

Dimming:	None
System Power [W]:	69
System Voltage [V]:	230V 50Hz
Protection Class:	1
Max load pr circuit - B10:	31
Max load pr circuit - B16:	50
Max load pr circuit - C10:	32
Max load pr circuit - C16:	52
Inrush current Imax [A]:	5
Inrush current time [µs]:	50
Socket / Cap-Base:	N/A



## FDV SPEC SHEET

Anka

Art. no: 6703-04-1



*Lighting Solutions*

### PRODUCT

Ingress Protection:	IP66
Impact Protection:	IK09
Corrosion Class:	C3
Wind force (EPA) [m2]:	0,13
Operating Temperature [°C]:	-25 - 40
Lifetime [h]:	L90B10: 100 000
Color:	Grey
RAL:	RAL7022
Length [mm]:	525
Height [mm]:	102
Width [mm]:	250
Weight [kg]:	5