




FDV SPEC SHEET

Anka

Art. no: 6707-04-1



Lighting Solutions

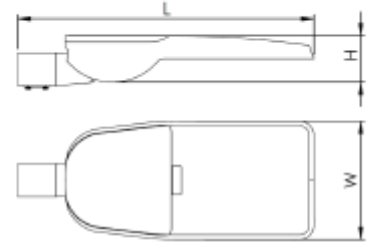

| L, mm | W, mm | H, mm |
|-------|-------|-------|
| 525 | 250 | 102 |
| 625 | 288 | 102 |
| 776 | 320 | 102 |

Anka



Art. no: 6707-04-1

LIGHT TECHNICAL

| | |
|--------------------------|----------------|
| Lightsource Type: | LED (built in) |
| Lumen Output: | 19500 |
| Lumen LED (tc=25): | 20000 |
| Beam Angle: | R4 Assymetric |
| CCT (Color Temperature): | 4000 |
| CRI / Ra: | 70 |
| Color Code: | 740 |
| MacAdam (SDCM): | 3 |

MOUNTING / CONNECTION

| | |
|-------------|------------|
| Connection: | Terminal |
| Mounting: | Wall, Mast |

ELECTRICAL DATA

| | |
|--------------------------------------|----------------------|
| Dimming: | None |
| Dimming Output Type: | Amplitude Modulation |
| System Power [W]: | 156 |
| System Voltage [V]: | 230V 50Hz |
| Protection Class: | 1 |
| Max load pr circuit - B10: | 4 |
| Max load pr circuit - B16: | 8 |
| Max load pr circuit - C10: | 6 |
| Max load pr circuit - C16: | 13 |
| Leakage current [mA]: | 0,33 |
| Inrush current I _{max} [A]: | 80 |
| Inrush current time [µs]: | 225 |
| Socket / Cap-Base: | N/A |



FDV SPEC SHEET

Anka

Art. no: 6707-04-1



Lighting Solutions

PRODUCT

| | |
|-----------------------------|-----------------|
| Ingress Protection: | IP66 |
| Impact Protection: | IK09 |
| Corrosion Class: | C3 |
| Wind force (EPA) [m2]: | 0,25 |
| Operating Temperature [°C]: | -25 - 40 |
| Lifetime [h]: | L90B10: 100 000 |
| Color: | Grey |
| RAL: | RAL7022 |
| Length [mm]: | 776 |
| Height [mm]: | 102 |
| Width [mm]: | 320 |
| Weight [kg]: | 9,4 |