




## FDV SPEC SHEET

Hali


Art. no: 6995-01-2



Lighting Solutions

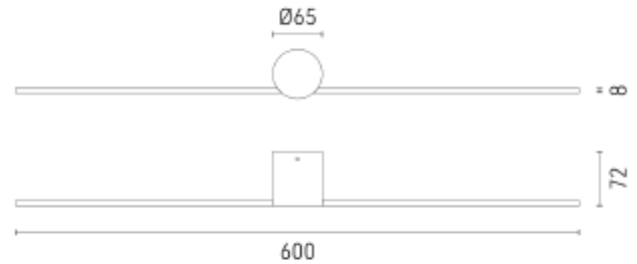

# Hali



Art. no: 6995-01-2

### LIGHT TECHNICAL

Lumen Output:	280
Lumen LED (tc=25):	550
Beam Angle:	120
CCT (Color Temperature):	3000
CRI / Ra:	80
Color Code:	830
MacAdam (SDCM):	3
Lens (Diffuser):	Opal
UGR (<=):	19

### MOUNTING / CONNECTION

Connection:	QuickConnect
Mounting:	Surface

### ELECTRICAL DATA

Dimming:	Phase-Cut
System Power [W]:	6
System Voltage [V]:	230V 50Hz
Protection Class:	2
Max load pr circuit - B10:	35
Max load pr circuit - B16:	56
Max load pr circuit - C10:	74
Max load pr circuit - C16:	118
Leakage current [mA]:	5
Inrush current I <sub>max</sub> [A]:	5
Inrush current time [µs]:	300
Socket / Cap-Base:	N/A
Current Output [mA]:	180



## FDV SPEC SHEET

Hali

Art. no: 6995-01-2



*Lighting Solutions*

### PRODUCT

Ingress Protection: IP44

Impact Protection: IK02

Lifetime [h]: L80B50: 50 000

Color: Black

Length [mm]: 600

Height [mm]: 8

Width [mm]: 65

Weight [kg]: 0,34