




## FDV SPEC SHEET

Universal IP44

Art. no: 8071-MW-105-3



Lighting Solutions

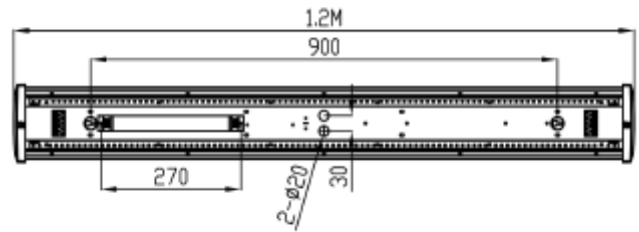

# Universal IP44



Art. no: 8071-MW-105-3

### LIGHT TECHNICAL

Lightsource Type:	LED (built in)
Lumen Output:	3650
Lumen LED (tc=25):	4000
Beam Angle:	105°
CCT (Color Temperature):	3000
CRI / Ra:	80
Color Code:	830
MacAdam (SDCM):	3
Lens (Diffuser):	PMMA Opal

### MOUNTING / CONNECTION

Connection:	QuickConnect
Through-wiring (mm2):	5x2,5
Mounting:	Surface, Ceiling

### ELECTRICAL DATA

Dimming:	Sensor (MW)
System Power [W]:	31
System Voltage [V]:	230V 50Hz
Protection Class:	1
Max load pr circuit - B10:	20
Max load pr circuit - B16:	32
Max load pr circuit - C10:	32
Max load pr circuit - C16:	54
Leakage current [mA]:	0,7
Inrush current I <sub>max</sub> [A]:	16
Inrush current time [µs]:	100
Socket / Cap-Base:	N/A



## FDV SPEC SHEET

Universal IP44

Art. no: 8071-MW-105-3



*Lighting Solutions*

### PRODUCT

Ingress Protection:	IP44
Operating Temperature [°C]:	-20 - 25
Lifetime [h]:	L80B10: 100 000
Color:	White
Length [mm]:	1200
Height [mm]:	59
Width [mm]:	150
Weight [kg]:	2,9