




## FDV SPEC SHEET

Galactic C

Art. no: 9067-02-2-ddd



Lighting Solutions

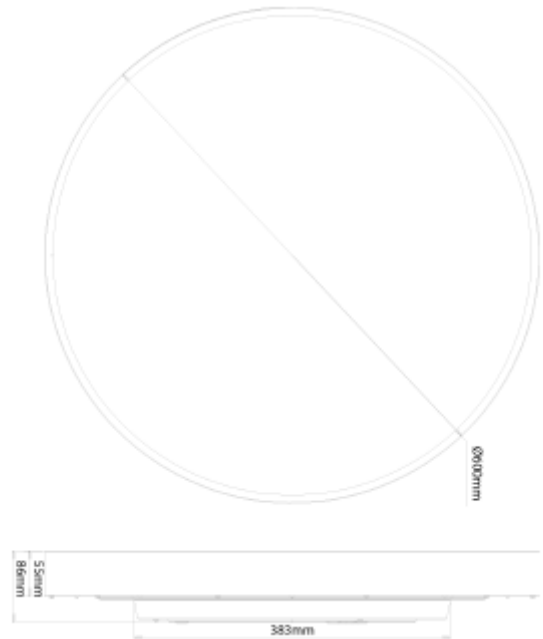

# Galactic C



Art. no: 9067-02-2-ddd

### LIGHT TECHNICAL

Lightsource Type:	LED (built in)
Lumen Output:	5900
Lumen LED (tc=25):	6400
Beam Angle:	120°
CCT (Color Temperature):	2700-3000K
CRI / Ra:	80
MacAdam (SDCM):	3
Lens (Diffuser):	Micropris.

### MOUNTING / CONNECTION

Connection:	QuickConnect
Cut-out [mm]:	Ø385-Ø415
Mounting:	Partial-recessed, Surface, Pendant

### ELECTRICAL DATA

Dimming:	DALI2
System Power [W]:	60
System Voltage [V]:	230V 50Hz
Protection Class:	1
Max load pr circuit - B10:	15
Max load pr circuit - B16:	24
Max load pr circuit - C10:	24
Max load pr circuit - C16:	40
Inrush current I <sub>max</sub> [A]:	25
Inrush current time [µs]:	280
Socket / Cap-Base:	N/A
Current Output [mA]:	500



## FDV SPEC SHEET

Galactic C

Art. no: 9067-02-2-ddd



*Lighting Solutions*

### PRODUCT

Ingress Protection:	IP40
Operating Temperature [°C]:	-20 - 45
Lifetime [h]:	L80B10: 100 000
Color:	Black
RAL:	RAL9005
Height [mm]:	86
Width [mm]:	600
Weight [kg]:	6,9
Housing Material :	Aluminium