



Trunk

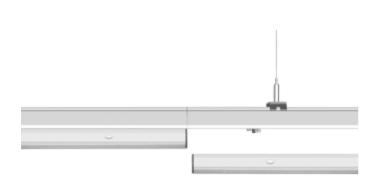

Unit: mm



NORLUX

Lighting Solutions

N

Trunk is a premium quality and highly advanced linear pendant light system offering

continuous light distribution. We offer a variety of accessories securing easy installation

and various layouts ensuring a natural like lighting to any area. The Trunk light fixtures

are manufactured in ultra-thin steel plates securing a long-life product. The Trunk fixtures

are delivered with all needed installation details in one box and no tools are needed for

the installation. Please see technical table below for detailed information. Batteries for emergency: 1 year warranty

CE	IP20	230V 50Hz	

SPECIFICATIONS

SPECIFICATIONS		
Lightsource Type:	LED (built in)	
System Power [W]:	70W	
CCT (Color Temperature):	3000K	
CRI / Ra:	80	
Lumen Output:	10800lm	
Lumen LED (tc=25):	11000lm	
Beam Angle:	60	
Lens (Diffuser):	Clear	
Dimming:	None	
Flickerfree:	Yes	
System Voltage [V]:	230V 50Hz	
Connection:	Trunk 8-wires	
Mounting:	Suspended, Ceiling	
Lifetime [h]:	L80B50: 100 000h	
Lumen/W:	154lm/W	
Color:	White	
Length [mm]:	1500mm	
Height [mm]:	78,6mm	
Width [mm]:	72,3mm	
Weight [kg]:	1,67kg	

NORLUX AS | Borgeskogen 32, 3160 Stokke | post@norlux.com | +47 33 30 10 80 | www.norlux.com

A⁺⁺