




FDV SPEC SHEET

Petrol

Art. no: 101422-3



Lighting Solutions

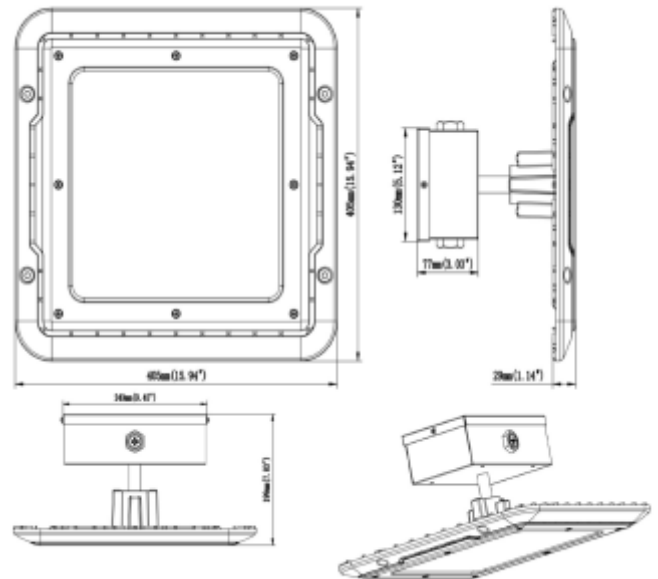

Petrol



Art. no: 101422-3

LIGHT TECHNICAL

| | |
|--------------------------|----------------|
| Lightsource Type: | LED (built in) |
| Lumen Output: | 20130 |
| Lumen LED (tc=25): | 21000 |
| Beam Angle: | 90° |
| CCT (Color Temperature): | 4000 |
| CRI / Ra: | 80 |
| Color Code: | 840 |
| MacAdam (SDCM): | 5 |

PRODUCT

| | |
|---------------------|---------|
| Ingress Protection: | IP66 |
| Impact Protection: | IK08 |
| Color: | White |
| RAL: | RAL9016 |
| Length [mm]: | 405 |
| Height [mm]: | 199 |
| Width [mm]: | 405 |
| Weight [kg]: | 6,1 |

ELECTRICAL DATA

| | |
|--------------------------------------|-----------|
| Dimming: | 1-10V |
| System Power [W]: | 150 |
| System Voltage [V]: | 230V 50Hz |
| Protection Class: | 1 |
| Max load pr circuit - B10: | 3 |
| Max load pr circuit - B16: | 6 |
| Max load pr circuit - C10: | 6 |
| Max load pr circuit - C16: | 10 |
| Leakage current [mA]: | 0,75 |
| Inrush current I _{max} [A]: | 110 |
| Inrush current time [µs]: | 200 |
| Socket / Cap-Base: | N/A |

MOUNTING / CONNECTION

| | |
|-----------|----------------------------|
| Mounting: | Recessed, Surface, Ceiling |
|-----------|----------------------------|