




## FDV SPEC SHEET

Tania Mini Slim  
Art. no: 101911-36-2-p



Lighting Solutions

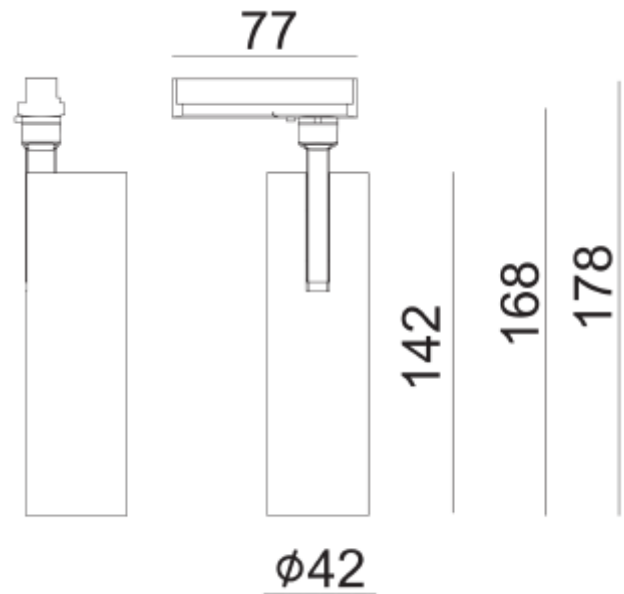

# Tania Mini Slim



Art. no: 101911-36-2-p

### LIGHT TECHNICAL

|                          |                |
|--------------------------|----------------|
| Lightsource Type:        | LED (built in) |
| Lumen Output:            | 740            |
| Lumen LED (tc=25):       | 850            |
| Beam Angle:              | 36°            |
| CCT (Color Temperature): | 3000           |
| CRI / Ra:                | 90             |
| Color Code:              | 930            |
| MacAdam (SDCM):          | 3              |
| Lens (Diffuser):         | Clear          |

### MOUNTING / CONNECTION

|             |                 |
|-------------|-----------------|
| Connection: | Track 1-Circuit |
| Mounting:   | Track, Ceiling  |

### ELECTRICAL DATA

|                                      |               |
|--------------------------------------|---------------|
| Dimming:                             | Phase-Cut     |
| Flickerfree:                         | Yes           |
| Flicker metric (Pst LM) <:           | 1             |
| Stroboscopic effect metric (SVM) <:  | 0,4           |
| System Power [W]:                    | 9             |
| System Voltage [V]:                  | 230V 50Hz     |
| Dimming Phasecut Type:               | Trailing edge |
| Protection Class:                    | 1             |
| Max load pr circuit - B10:           | 125           |
| Max load pr circuit - B16:           | 200           |
| Max load pr circuit - C10:           | 125           |
| Max load pr circuit - C16:           | 200           |
| Inrush current I <sub>max</sub> [A]: | 5             |
| Inrush current time [µs]:            | 100           |
| Voltage Forward Min [V]:             | 32,3          |
| Voltage Forward Max [V]:             | 38,1          |
| Dimming Phasecut Type:               | Trailing edge |



## FDV SPEC SHEET

Tania Mini Slim

Art. no: 101911-36-2-p



*Lighting Solutions*

### PRODUCT

|                             |                 |
|-----------------------------|-----------------|
| Ingress Protection:         | IP20            |
| Operating Temperature [°C]: | -20 - 40        |
| Lifetime [h]:               | L80B10: 100 000 |
| Color:                      | Black           |
| RAL:                        | RAL9005         |
| Height [mm]:                | 142             |
| Diameter [mm]:              | 42              |
| Housing Material :          | Aluminium       |
| Housing Material :          | Aluminium       |