




## FDV SPEC SHEET

Halo Pendant On/Off


Art. no: 1129-1-120-9



Lighting Solutions

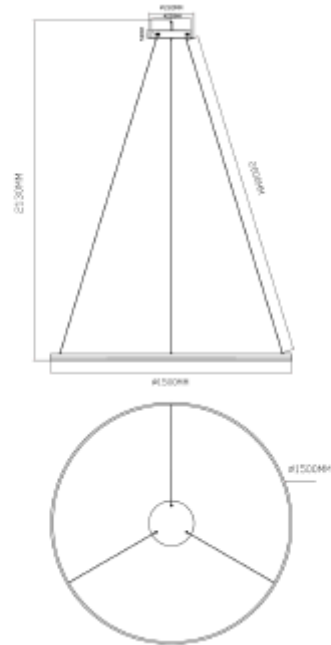

# Halo Pendant On/Off



Art. no: 1129-1-120-9

### LIGHT TECHNICAL

|                          |                |
|--------------------------|----------------|
| Lightsource Type:        | LED (built in) |
| Lumen Output:            | 2500           |
| Lumen LED (tc=25):       | 6100           |
| Beam Angle:              | 120            |
| CCT (Color Temperature): | 3000           |
| CRI / Ra:                | 80             |
| Color Code:              | 830            |
| Lens (Diffuser):         | Frosted        |

### MOUNTING / CONNECTION

|             |                       |
|-------------|-----------------------|
| Connection: | 18i3 Quick connection |
| Mounting:   | Ceiling, Pendant      |

### PRODUCT

|                     |                 |
|---------------------|-----------------|
| Ingress Protection: | IP20            |
| Lifetime [h]:       | L80B10: 100 000 |
| Color:              | Gold/White      |
| Height [mm]:        | 34              |
| Width [mm]:         | 1500            |

### ELECTRICAL DATA

|                                      |           |
|--------------------------------------|-----------|
| Dimming:                             | None      |
| System Power [W]:                    | 53        |
| System Voltage [V]:                  | 230V 50Hz |
| Protection Class:                    | 2         |
| Leakage current [mA]:                | 0,5       |
| Inrush current I <sub>max</sub> [A]: | 5         |
| Voltage Forward Min [V]:             | 66        |
| Voltage Forward Max [V]:             | 72        |