



## PRODUCT SHEET



Pollux Square

Art. no: 2115-S-120-3




Lighting Solutions

# Pollux Square

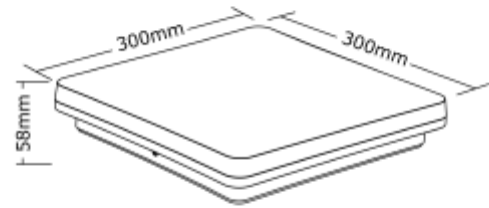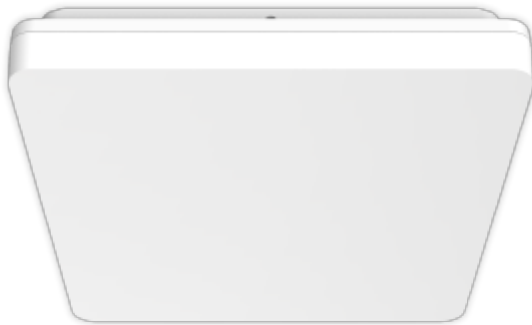

### SPECIFICATIONS

Lightsource Type:	LED (built in)
System Power [W]:	25W
CCT (Color Temperature):	3/4/5700
CRI / Ra:	80
Lumen LED (tc=25):	2600lm
Beam Angle:	120
Lens (Diffuser):	Opal
Dimming:	Sensor (MW)
System Voltage [V]:	230V 50Hz
Connection:	QuickConnect
Mounting:	Surface, Ceiling
Lifetime [h]:	L80B50: 50 000h
MacAdam (SDCM):	3
Color:	White
Length [mm]:	300mm
Height [mm]:	58mm
Width [mm]:	300mm

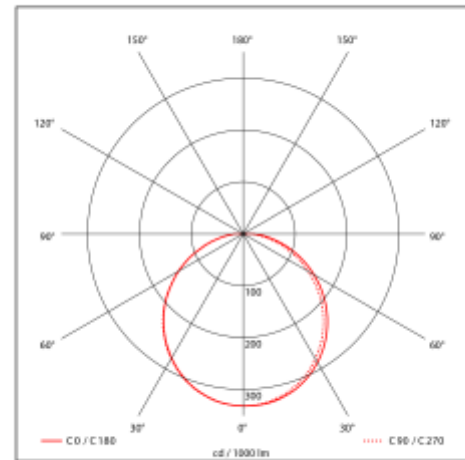

Pollux Sensor er en takmontert plafond med høyt lysutbytte og jevn lys fordeling og microwave sensor. Den leveres med switch som gjør det enkelt å bytte mellom 3000K(standard), 4000K, 5700K. Data er basert på 4000K.

Standard innstillingene for Pollux Sensor: Standby time 30s, standby brightness off, detection range 4-6m, dagslyssensor innstilling natt.

Innstillingene kan endres med Pollux Controll.

Velg mellom 30s, 3min eller 10min standby time. If standby brightness is active it has priority over daylight sensor.

Standby brightness: av, 10%, 20% eller 30%.

Sensor detection range: 2-4m, 4-6m eller 5-9m.

Dagslyssensor: Av, skumring (50-100 lux) eller natt (10-50 lux)