




FDV SPEC SHEET
 Silindir Maxi Short
 Art. no: 3403-7-40-3-ddd



Silindir Maxi Short

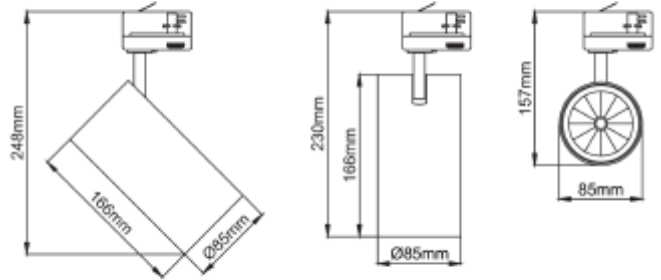

Art. no: 3403-7-40-3-ddd

LIGHT TECHNICAL

Lumen Output:	3064
Lumen LED (tc=25):	3550
Beam Angle:	40°
CCT (Color Temperature):	3000
CRI / Ra:	90
Color Code:	930
MacAdam (SDCM):	3
Lens (Diffuser):	Clear

MOUNTING / CONNECTION

Connection:	Track 3-Circuit+dim
Mounting:	Track, Ceiling

PRODUCT

Ingress Protection:	IP20
Lifetime [h]:	L80B10: 100 000
Color:	White
Length [mm]:	166
Width [mm]:	85
Weight [kg]:	1

ELECTRICAL DATA

Dimming:	DALI2
Flicker metric (Pst LM) <:	1
Stroboscopic effect metric (SVM) <	0,04
System Power [W]:	28
System Voltage [V]:	230V 50Hz
Dimming Output Type:	Amplitude Modulation
Protection Class:	1
Max load pr circuit - B10:	40
Max load pr circuit - B16:	64
Max load pr circuit - C10:	20
Max load pr circuit - C16:	30
Leakage current [mA]:	0,7
Inrush current I _{max} [A]:	9,6
Inrush current time [µs]:	32
Current Output [mA]:	700
Voltage Forward Min [V]:	29,3
Voltage Forward Max [V]:	38,7
Dimming Output Type:	Amplitude Modulation