



FDV SPEC SHEET


Tania Mini Basic
Art. no: 3560-18-3



Lighting Solutions



51mm

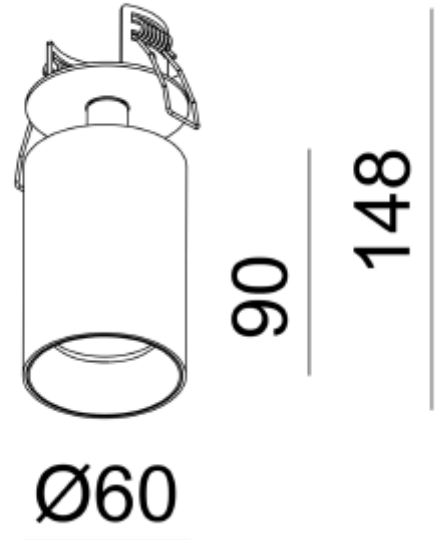

Tania Mini Basic



Art. no: 3560-18-3

LIGHT TECHNICAL

Lightsource Type:	LED (built in)
Lumen Output:	1475
Lumen LED (tc=25):	1550
Beam Angle:	18°
CCT (Color Temperature):	3000
CRI / Ra:	90
Color Code:	930
Lens (Diffuser):	Clear

MOUNTING / CONNECTION

Connection:	Terminal
Cut-out [mm]:	Ø51
Mounting:	Recessed, Ceiling

ELECTRICAL DATA

Dimming:	Phase-Cut
Dimming Phasecut Type:	Leading / Trailing edge
System Power [W]:	14,5
System Voltage [V]:	230V 50Hz
Protection Class:	1
Max load pr circuit - B10:	35
Max load pr circuit - B16:	56
Max load pr circuit - C10:	74
Max load pr circuit - C16:	118
Leakage current [mA]:	0,7
Inrush current I _{max} [A]:	5
Inrush current time [µs]:	300
Current Output [mA]:	350
Dimming Phasecut Type:	Leading / Trailing edge



FDV SPEC SHEET

Tania Mini Basic
Art. no: 3560-18-3



Lighting Solutions

PRODUCT

To be recessed in insulation:	No
Ingress Protection:	IP20
Operating Temperature [°C]:	-20 - 40
Lifetime [h]:	L80B10: 100 000
Color:	White
Length [mm]:	90
Width [mm]:	60
Diameter [mm]:	60
Housing Material :	Aluminium
Housing Material :	Aluminium